

2. MOTOR PROTECTION RELAYS

2.1 Thermal Overload Relays

TH-N Series Thermal Overload Relays Will Make a Convenience and Safer Systems.



TH-N12



TH-N20



TH-N12CX

A Selection of Relays for Optimum Motor Protection Characteristics


The thermal relay line-up includes two-element units as well as the phase failure protection type models (three-element relays), all with the same external dimensions.

This array of protection characteristics allows you to choose the units best suited to your motor protection needs.


Maintenance and Inspection Are Easy

An operation indicator makes maintenance and inspection easy. Checks can be performed using manual operations.

1NO + 1NC Contacts

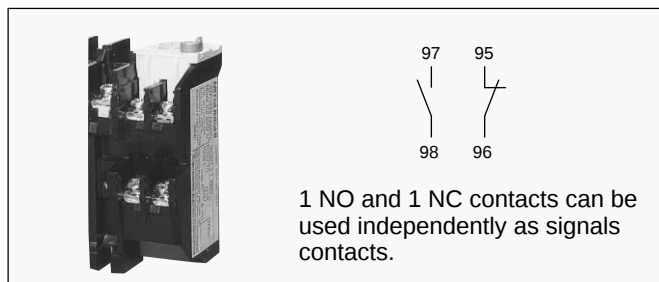

• Display and External Trip Mechanism

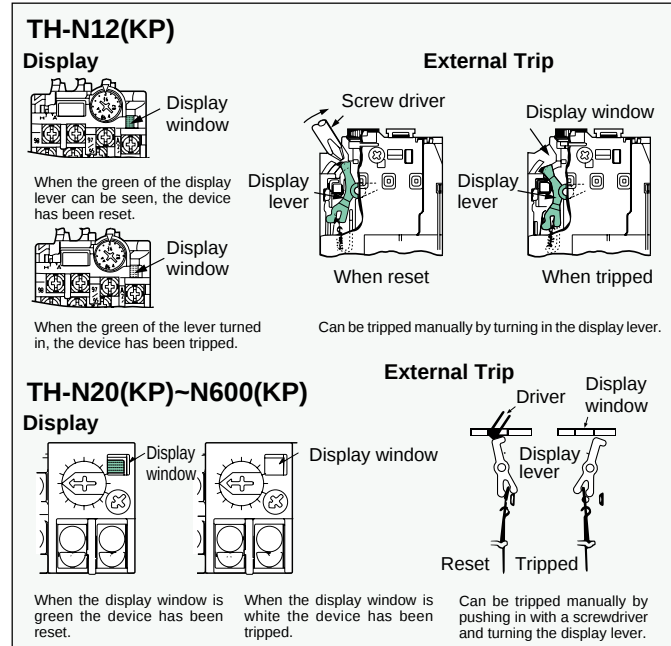

Rated Current Can Be Set Easily

The value of the rated current is displayed on a dial. Simply adjust the dial to the full-load current of the motor and motor protection is assured.

Finger Protectors

Models with finger protectors that conform to DIN VDE 0106 Part 100 (TH-N□CX) are also available.

Various Accessories

- Independent mount adaptor for TH-N12(CX) : UN-HZ12(CX)
- Reset release : UN-RR□□□
- Trip indicating LED : UN-TL□□

Trip-Free Reset Bar

Choose between automatic and manual reset. Also features tripfree reset bar mechanism.

• Switching Between Automatic and Manual Reset

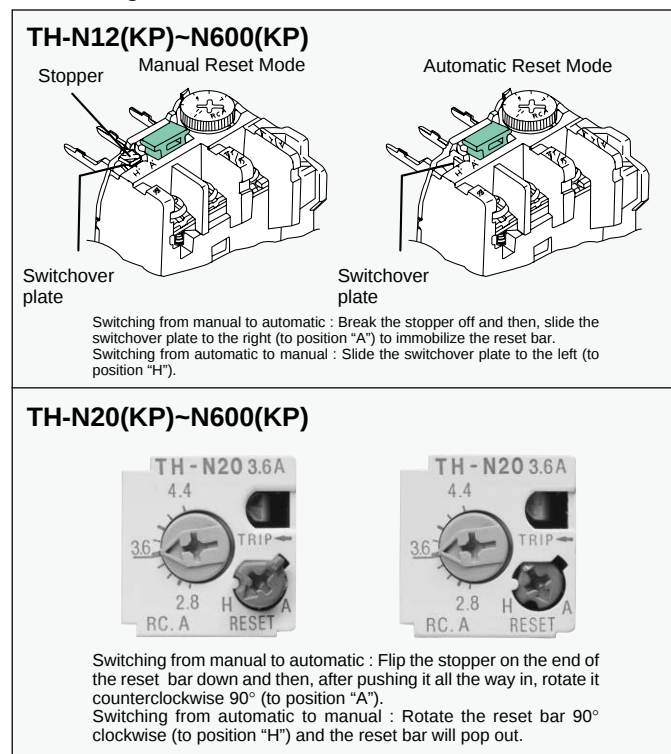


Table 2.1.1

2.1.1 Selection Guide of Thermal Overload Relays

Max. Fuse Rating (660Vac) IEC 269-1 (A)			Overload Relay			Motor Capacity [kW, (hp)] (Three phase 50/60Hz, based on four poles)			
aM	gG	gM	Heater design- nation	Setting range (A)	Model (TH-)	AC220-240V	AC380V	AC400-440V	AC500V
0.5	0.5	—	0.12A	0.1-0.16	N12	—	—	—	—
0.5	1	—	0.17A	0.14-0.22		—	—	—	—
1	2	—	0.24A	0.2-0.32		0.03(1/24)	0.06(1/12)	0.06(1/12)	0.09(1/8)
1	2	—	0.35A	0.28-0.42		0.05(1/16)	0.09(1/8)	0.09(1/8)	0.12(1/6)
1	2	—	0.5A	0.4-0.6		0.06(1/12)	0.12(1/6)	0.12(1/6)	0.18(1/4)
2	4	—	0.7A	0.55-0.85		0.09(1/8)	0.18(1/4)	0.18(1/4)	0.25(1/3)
2	4	—	0.9A	0.7-1.1		0.12(1/6)	0.25(1/3)	0.25(1/3)	0.37(1/2)
2	4	—	1.3A	1.0-1.6		0.18(1/4)	0.37(1/2)	0.37(1/2) 0.55(3/4)	0.55(3/4)
4	6	—	1.7A	1.4-2.0		0.25(1/3)	0.55(3/4)	0.75(1)	0.75(1)
4	6	—	2.1A	1.7-2.5		0.37(1/2)	0.75(1)	—	1.1(1-1/2)
6	10	—	2.5A	2.0-3.0		0.55(3/4)	1.1(1-1/2)	1.1(1-1/2)	1.5(2)
6	10	—	3.6A	2.8-4.4		0.75(1)	1.5(2)	1.5(2)	2.2(3)
8	16	—	5A	4.0-6.0		1.1(1-1/2)	2.2(3)	2.2(3)	3(4)
12	20	—	6.6A	5.2-8.0		1.5(2)	3(4)	3.3, 7(4.5)	3.7(5)
12	20	—	9A	7.0-11		2.2(3)	3.7(5) 4(5-1/2)	3(4) 3.7(5)	5.5(7-1/2)
16	25	32M35	11A	9.0-13		3(4)	5.5(7-1/2)	5.5(7-1/2)	7.5(10)
20	32	32M50	15A	12-18		3.7(5)	7.5(10)	7.5(10) 9(12.5)	9(12/5)
25	40	32M63	19A ¹	16-22	N20	5.5(7-1/2)	11(15)	11(15)	11(15)
40	63	32M63	22A	18-26		5.5(7-1/2)	11(15)	11(15)	15(20)
50	80	63M80	29A	24-34		7.5(10)	15(20)	15(20)	18.5(25)
63	80	63M80	35A ²	30-40		9(12.5)	18.5(25)	18.5(25)	22(30)
63	100	100M100	42A	34-50		11(15)	22(30)	22(30)	30(40)
80	125	100M125	54A	43-65		15(20)	30(40)	30(40)	37(50)
100	160	100M160	67A	54-80		18.5(25)	37(50)	37(50)	45(60)
125	200	100M200	82A	65-100		22(30)	45(50)	45(60)	55(75)
—	200	100M200	95A ³	85-105		30(40)	55(75)	55(75)	—
—	250	200M250	105A	85-125		30(40)	55(75)	55(75)	75(100)
—	250	200M250	125A	100-150		37(50)	75(100)	75(100)	90(125)
—	315	200M315	150A	120-180		45(60)	90(125)	90(125)	110(150)
—	400	—	180A	140-220		55(75)	110(150)	110(150)	132(175)
—	500	—	210A ⁴	170-250		75(100)	132(180)	132(180)	—
—	630	—	250A	200-300		75(100)	132(180) 160(220)	132(180) 160(220)	160(220)
—	630	—	330A	260-400		90(125) 110(150)	200(270)	200(270)	220(300) 250(340)
—	800	—	500A	400-600	N60	132(180) 160(220)	220(300) 250(340) 300(400)	220(300) 250(340) 300(400)	400(530)
—	1000	—	660A	520-800		200(270) 220(300)	400(530)	400(530)	500(670)

Notes: 1. For starter size N20, N21 only. 2. For starter size N35 only. 3. For starter size N95 only. 4. For starter size N220 only.
5. Selection by mounting

Contactor mounting	W/o F/P (2)	TH-N12(KP)	TH-N18(KP)	TH-N20(KP)	TH-N20TA(KP)	TH-N60(KP)	TH-N60TA(KP)	TH-N120(KP)	TH-N120TA(KP)	TH-N220RH(KP)	TH-N400RH(KP)	—
	With F/P (3)	TH-N12CXKP	TH-N18CXKP	TH-N20CXKP	TH-N20TAKPCX	TH-N60CXKP	—	—	—	—	—	—
Independent mounting	W/o F/P (2)	TH-N12(KP) + UN-HZ12 ⁽⁴⁾	—	TH-N20(KP)	—	TH-N60(KP)	—	TH-N120(KP)	TH-N120TAHZ(KP)	TH-N220HZ(KP)	TH-N400HZ(KP)	TH-N600(KP) + CT
	With F/P (3)	TH-N12CXKP + UN-HZ12CX ⁽⁴⁾	—	TH-N20CXHZKP	—	TH-N60CXKP	—	—	—	—	—	—

Notes: 1. Use "Connecting parts" when couple with contactor (see Table 2.1.6(3)). 2. W/o F/P: Without Finger Protection.
3. With F/P: With Finger Protection. 4. UN-HZ12(CX) is shipped separately from TH-N12(CX)(KP).
5. CT should be supplied by customer.

2.1.2 Selection Guide of the Current Transformers for TH-N600KP

Table 2.1.2

Current Transformer for TH-N600KP	Heater Designation(A)		250	330	500	660
	Setting Range(A)		200~300	260~400	400~600	520~800
	Current Transformer Ratio		400/5A	500/5A	750/5A	1,000/5A
	Current Transformer Capacity		At least 15VA			
	Recommended MITSUBISHI Current Transformer Model Number	Cable wiring	CW-15L 400/5A 15VA	CW-15L 500/5A 15VA	CW-15L 750/5A 15VA	—
		Bus bar wiring	CW-15LM 400/5A 15VA	CW-15LM 500/5A 15VA	CW-15LM 750/5A 15VA	CW-40LM 1000/5A 40VA

* Current transformer to be supplied by customer.

2.1.3 Technical Data

Table 2.1.3

Three heater type Two heater type	TH- TH-	N12(CX)KP N12(CX)	N18(CX)KP N18(CX)	N20(CX)KP N20(CX)	N20TA(CX)KP N20TA(CX)	N60(CX)KP N60(CX)	N60TAKP N60TA	N120KP N120	N120TAKP N120TA	N220RHKP N220RH	N400RHKP N400RH	N600KP N600	
Max. setting current	A	13	18	22	40	65	105	100	150	220	400	800	
Range of setting current	A	0.1-13	2.8-18	0.2-22	18-44	12-65	54-105	34-100	85-150	65-250	85-400	200-800	
Rated insulation voltage	V	690	690	690	690	690	690	690	690	1000	1000	690	
Permissible ambient temperature	°C	-25 to +55											
Single phase protection	Types TH-N/K □□□ KP provide the protection.												
Bimetal heating	Direct									Via CTs		Via CTs ¹	
Max. heater dissipation per current path													
Min. setting	W	0.8	0.9	0.8	1.4	1.7	2.4	2.5	3.2	2.5	2.5	2.5	
Max. setting	W	1.8	2.2	2.2	3.5	4.9	5.2	7.1	8.6	6.0	6.0	6.0	
Auxiliary contact	1NO + 1NC												
Rated operating current of aux. contacts													
Category	NO	120V	A	2	2								
AC-15	contact	240V	A	1	1								
		500V	A	0.5	0.5								
		NC	120V	A	2	3							
	contact	240V	A	1	2								
		500V	A	0.5	1								
		Category	48V	A	0.4	0.5							
DC-13		110V	A	0.2	0.2								
		220V	A	0.1	0.1								
Main terminal screw size													
Line side	mm	—		M4	M4	M6	M6	M8	M8	—	—	M4	
Load side	mm	M3.5	M4	M4	M5	M6	M6	M8	M8	M10	M12	M4	
Standard wire sizes recommended													
Heater designation-wire size	(mm ²)	0.24A-2 11A-2	3.6A-2 11A-2 15A-3.5	0.24A-2 11A-2 15A-3.5 19A-3.5	22A-5.5 29/35A-8	15A-3.5 22A-5.5 29/35A-8 42A-14 54A-22	67A-22 82/95A-38	42A-14 54/67A-22 82A-38	105A-60 125A-60	— —	— —	— —	
Max. conductor size													
Main	Line side	mm ²	(2.5) ²	—	6	—	25	—	38	60	—	—	6
	Load side	mm ²	2.5	6	6	16	25	38	38	60	150	240	6
	Busbar width												
	Line side	mm	—		—	—	15	—	20	20	—	—	—
	Load side	mm	—		—	—	15	20	20	20	25	30	—
Aux. contacts	mm ²	2.5		4	4	4	4	4	4	4	4	4	

Notes: 1. Used with current transformer (to be supplied by the customer). See Table 2.1.2.

2. When used with UN-HZ 12(CX) adaptor.

2.1.4 Selection Guide of Quick Trip Thermal Overload Relay

Table 2.1.4

Applicable contactor	S-N10 S-N11 S-N12	S-N20 S-N21 S-N25 S-N35	S-N25 S-N35	S-N50 S-N65 S-N80 S-N95	S-N80 S-N95
Three heater type with phase failure protection	TH-N12KF	TH-N20KF	TH-N20TAKF	TH-N60KF	TH-N60TAKF
Two heater type	—	TH-N20FS	TH-N20TAFS	TH-N60FS	TH-N60TAFS
Heater setting range (Ordering designation)	1.7~2.5 (2.1A) 2.8~4.4 (3.6A) 4~6 (5A) 5.2~8 (6.6A) 7~11 (9A) 9~13 (11A)	1.7~2.5 (2.1A) 2.8~4.4 (3.6A) 4~6 (5A) 5.2~8 (6.6A) 7~11 (9A) 9~13 (11A) 12~18 (15A)	18~26 (22A) 24~34 (29A) 30~40 (35A)¹	34~50 (42A) 43~65 (54A)	54~80 (67A) 65~93 (82A)²


Notes: *1. Only for S-N35.

*2. Only for S-N95.


2.1.5 Operating Characteristics of Thermal Overload Relays

(Connecting wire size: Refer to “standard wire size” of Table 2.1.3)


TH-N12
TH-N12KP·TH-N12SR

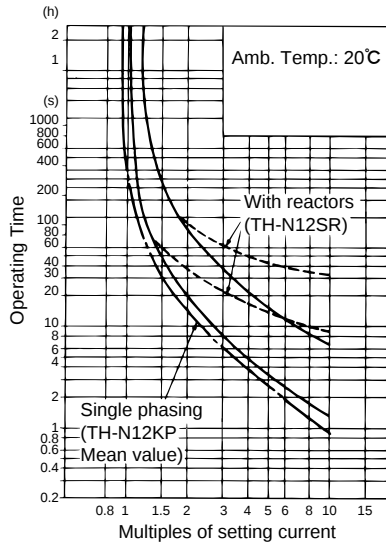


TH-N18
TH-N18KP

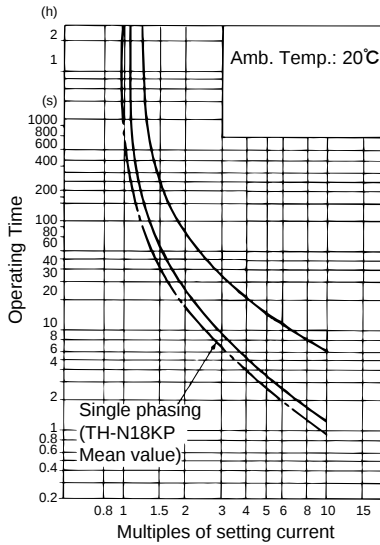


TH-N20·TH-N20KP
TH-N20SR·TH-N20KPSR

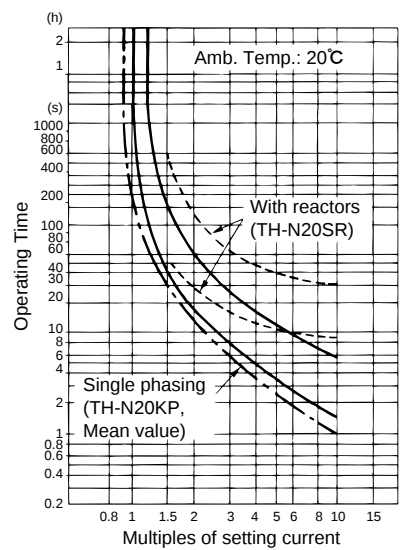


TH-N20TA·TH-N20TAKP
TH-N20TASR·TH-N20TAKPSR

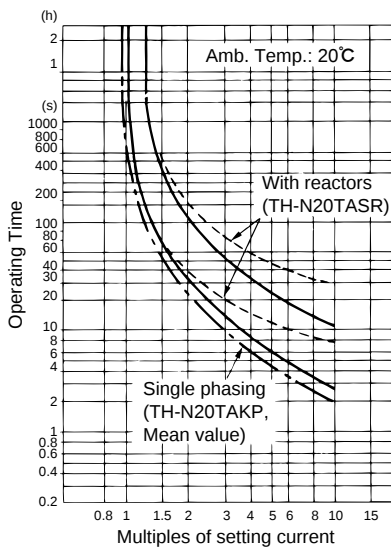


TH-N60·TH-N60TA
TH-N60KP·TH-N60TAKP
TH-N60SR·TH-N60TASR
TH-N60KPSR·TH-N60TAKPSR

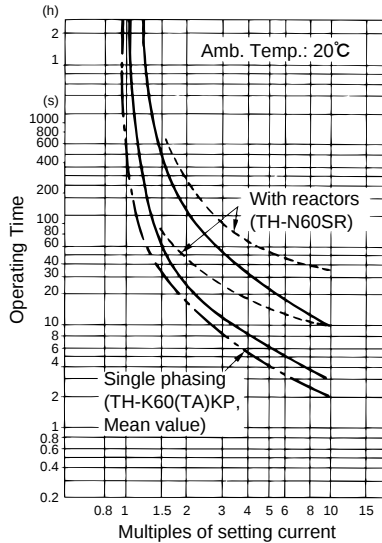


TH-N120·TH-N120KP
TH-N120SR·TH-N120KPSR
TH-N120TA·TH-N120TAKP
TH-N120TASR·TH-N120TAKPSR

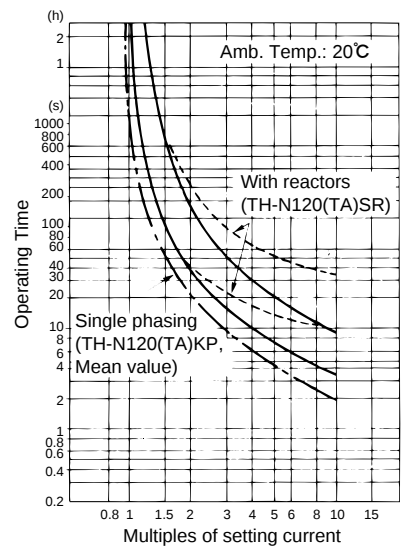

TH-N220RH
TH-N220RHKP
TH-N220RHRSR
TH-N220RHKPSR
TH-N400RH
TH-N400RHKP
TH-N400RHRSR
TH-N400RHKPSR

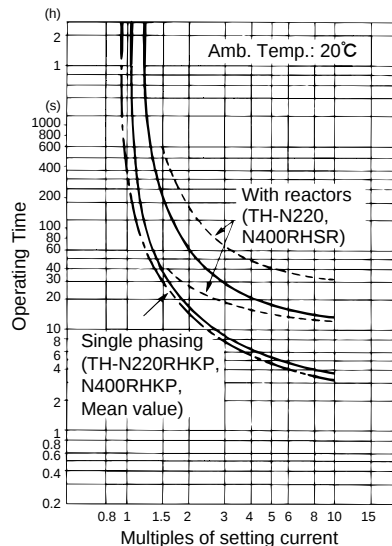

TH-N600
TH-N600KP
TH-N600SR
TH-N600KPSR

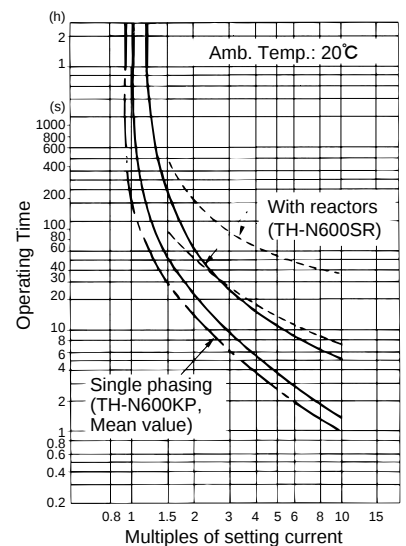

2.1.6 Optional Parts and Accessories

Saturable Reactors for Slow Tripping

Ordering designation

THR - G22	PT
↓	↓
Part number	3 heater 2 heater
see table 2.1.6(1)	PT PD

Table 2.1.6 (1)

Heater Designation	Part number						
	TH-N12 ¹	TH-N20(KP)	TH-N20TA(KP)	TH-N60(KP) TH-N60TA(KP)	TH-N120(KP) TH-N120TA(KP)	TH-N220□□(KP) TH-N400□□(KP)	TH-N600(KP)
0.24A	TSR-A0Y	TSR-C0Y	—	—	—	—	—
0.35A	TSR-A0Y	TSR-C0Y	—	—	—	—	—
0.5A	TSR-A01	TSR-C0Y	—	—	—	—	—
0.7A	TSR-A03	TSR-C03	—	—	—	—	—
0.9A	TSR-A05	TSR-C03	—	—	—	—	—
1.3A	TSR-A09	TSR-C07	—	—	—	—	—
1.7A	TSR-A11	TSR-C09	—	—	—	—	—
2.1A	TSR-A12	TSR-C10	—	—	—	—	—
2.5A	TSR-A13	TSR-C12	—	—	—	—	—
3.6A	TSR-A15	TSR-C15	—	—	—	—	—
5A	TSR-A18	TSR-C17	—	—	—	—	—
6.6A	TSR-A21	TSR-C20	—	—	—	—	—
9A	TSR-A23	TSR-C23	—	—	—	—	—
11A	TSR-A25	TSR-C25	—	—	—	—	—
15A	—	TSR-C26	—	THR-G22	—	—	—
19A	—	TSR-C29	—	—	—	—	—
22A	—	—	TSR-D28	THR-G24	—	—	—
29A	—	—	TSR-D29	THR-G26	—	—	—
35A	—	—	TSR-D28	THR-G27	—	—	—
41A	—	—	—	THR-G27	THR-H41	—	—
54A	—	—	—	THR-G29	THR-H42	—	—
67A	—	—	—	THR-G29	THR-H43	—	—
82A	—	—	—	THR-G30	THR-H43	THR-F10	—
95A	—	—	—	THR-G30	—	—	—
105A	—	—	—	—	THR-H44	THR-F13	—
125A	—	—	—	—	THR-H45	THR-F13	—
150A	—	—	—	—	—	THR-F15	—
180A	—	—	—	—	—	THR-F16	—
210A	—	—	—	—	—	THR-F17	—
250A	—	—	—	—	—	THR-F18	THR-E13
330A	—	—	—	—	—	THR-F19	THR-E13
500A	—	—	—	—	—	—	THR-E13
660A	—	—	—	—	—	—	THR-E13

Note: 1. Saturable reactors can be adopted only for the two heater type TH-N12

Table 2.1.6 (2)

Trip indicator	Thermal overload relay	Voltage(50/60Hz)	Part number
	TH-N12(CX)(KP) TH-N18(CX)(KP)	AC 24/DC24V AC 100-127V AC 200-240V	UN-TL15DC24V UN-TL15AC100V UN-TL15AC200V
Reset release	TH-N20,N20TA(CX)(KP) TH-N60(CX)(KP)~N600(KP)	AC 24/DC24V AC 100-127V AC 200-240V	UN-TL20DC24V UN-TL20AC100V UN-TL20AC200V
	Thermal overload relay	Part number	Length (mm)
	TH-N12(CX)(KP) TH-N18(CX)(KP)	UN-RR205 UN-RR405 UN-RR555 UN-RR705	200 400 550 700
	TH-N20,N20TA(CX)(KP) TH-N60(KP)~N600(KP) ¹	UN-RR200 UN-RR400 UN-RR550 UN-RR700	200 400 550 700
Separate mounting adaptor	Thermal overload relay	Part number	
	TH-N12(TP/KP) TH-N12CX(TP/KP)	UN-HZ12 UN-HZ12CX	

Note: 1. Except for type TH-N60CX and TH-N60CXKP.


• Connecting Parts for Contactors to Thermal Overload Relays

Table 2.1.6 (3)


	For connection between contactor (non-reversing type) and thermal overload relay	Overload relay	Contactor	Part number	Mass(kg)
		TH-N20(CX)(KP)	S-N20(CX), S(D)-N21(CX)	UN-TH20	0.02
		TH-N20(CX)(KP), -N20TA(CX)(KP)	S-N25(CX), S(D)-N35(CX)	UN-TH25(CX)	0.02
		TH-N60(CX)(KP)	S-N50(CX), -N65(CX) SD-N50, -N65	BH559N350	0.02
		TH-N60(KP), -N60TA(KP)	S-N80, -N95 SD-N80, -N95	BH569N350 BH569N352	0.04 0.04
		TH-N120(KP), N120TA(KP)	S(D)-N125 S(D)-N150	BH579N355 BH589N355	0.36 0.36

* Connecting bars and mounting plate are included in the OLR of TH-N220RH(KP) and TH-N400RH(KP) for S-N180, -N220, -N300, -N400.





2.1.7 Outline Dimensions

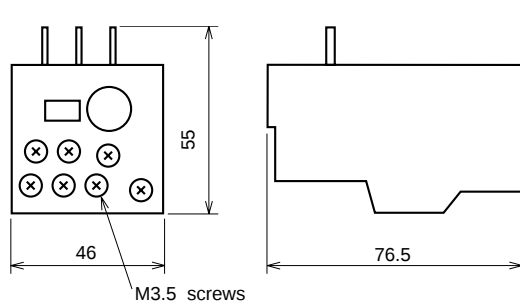

TH-N12(CX)(KP) (Mass: 0.11kg)

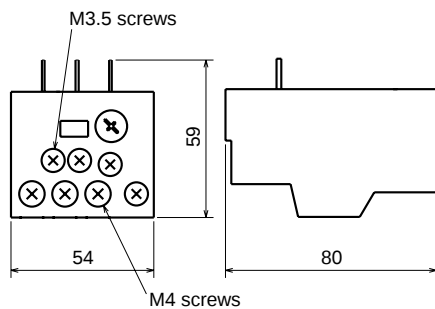

TH-N18(CX)(KP) (Mass: 0.14kg)

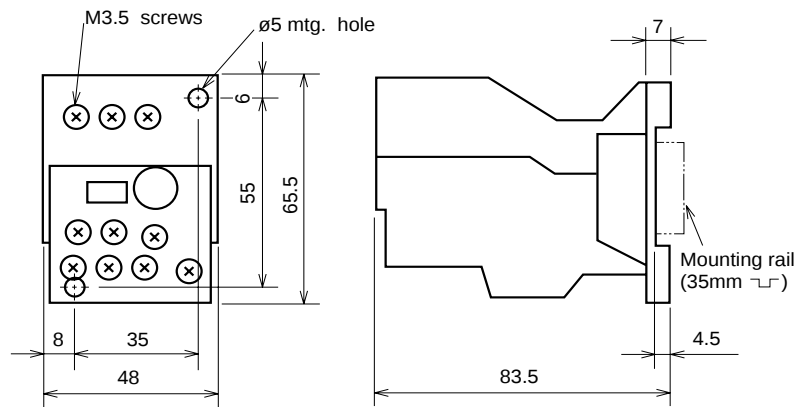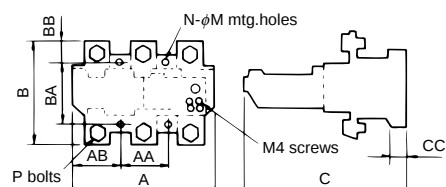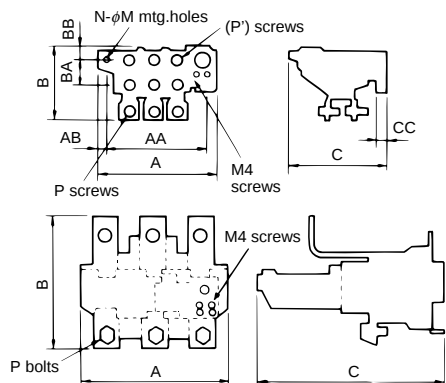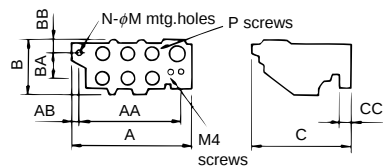

TH-N12(CX)(KP) with mounting adapter UN-HZ12(CX)

Type	A	B	C	AA	AB	BA	BB	CC	N	M	P	Q	Mass (kg)
TH-N20(CX)(KP)	63	51	79	19	15	33	8.5	7	2	4.5	M4	M3.5	0.14
TH-N60(KP)	91.5	57	87	70	12	45	6	9	2	4.5	M6	M4	0.28
TH-N60CX(KP)	91.5	57	87	70	12	45	6	9	2	4.5	M6	M4	0.28
TH-N120(KP)	103	67	105	75	14	50	6	10	2	6	M8	M4	0.48
TH-N600(KP)	63	42	83.5	19	14	33	2	7	2	4.5	M4	M4	0.14

Type	A	B	C	AA	AB	BA	BB	CC	N	M	P(P)	Mass (kg)
TH-N20TA(CX)(KP)	74	72	83.5	—	—	—	—	—	—	—	M5 (M4)	0.2
TH-N60TA(KP)	89	73.5	83.5	—	—	—	—	—	—	—	M6 (M6)	0.32
TH-N120TA(KP)	112	87	105	—	—	—	—	—	—	—	M8 (M8)	0.75
TH-N120TAHZ(KP)	112	103	105	75	25	50	25	10	2	6	M8 (M8)	1.0

Type	A	B	C	AA	AB	BA	BB	CC	N	M	P	Mass (kg)
TH-N220RH(KP)	144	114	179.5	—	—	—	—	—	—	—	M10	2.5
TH-N400RH(KP)	144	160	193.5	—	—	—	—	—	—	—	M12	2.7

Type	A	B	C	AA	AB	BA	BB	CC	N	M	P	Mass (kg)
TH-N220HZ(KP)	144	104	166.5	47	48.5	62	21	18	4	6	M10	2.5
TH-N400HZ(KP)	144	173	166.5	47	48.5	62	55.5	18	4	6	M12	2.7

Note: Suffix "HZ" denotes separate mounting type.

2.2 Electronic Motor Protection Relays

Series ET-N




ET-N60 60A

The MITSUBISHI series ET-N relay is an excellent relay that can protect motors electrically. Those series ET-N relays have the following excellent features.

■ Features

- Selectable Protection Mode
 - Overload (including locked rotor condition)
 - Phase failure (including current unbalance)
 - Incorrect phase sequence
 - Excellent Wide Current Range
 - Easy Wiring
 - Easy Setting and Maintainance
 - Selectable Tripping Time at 600% of setting. Standard trip (7s.)
- Quick trip (3s.)
 - Fast trip (5s.)
 - Medium trip (15s.)
 - Slow trip (30s.)
 - Withstands High Overcurrent
 - Fine Indication of Trip Mode
 - Conformity to International Standards
 - Can be mounted on 35mm rail (ET-N60)

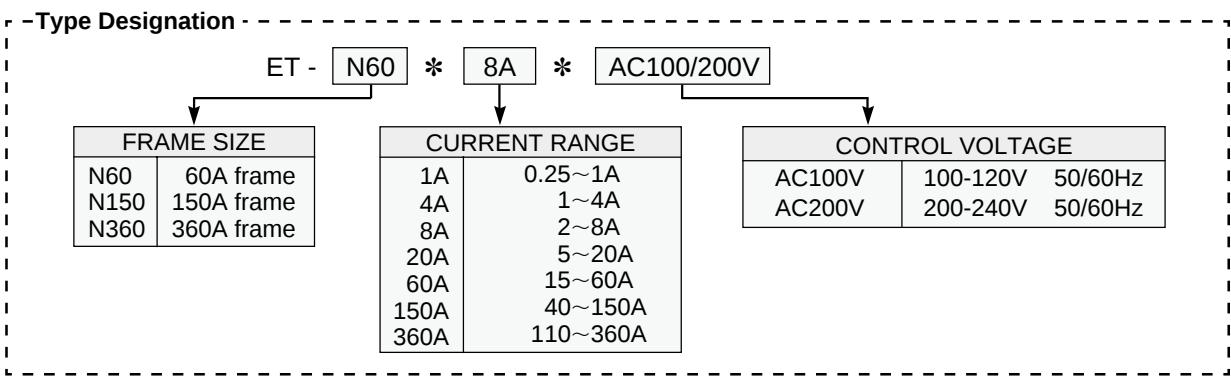

■ Specifications


• Ratings and characteristics

Table 2.2.1

Frame size [Current range]			N60[1A]	N60[4A]	N60[8A]	N60[20A]	N60[60A]	N150[150A]	N360[360A]
Rated insulation voltage		VAC	690						
Adjustable setting range		A	0.25-1	1-4	2-8	5-20	15-60	40-150	110-360
Applicable motor capacity 3-ph	200-240VAC	kW	0.03-0.2	0.2-0.75	0.4-1.5	1.5-4	3.7-11	11-37	30-90
	380-440VAC	kW	0.05-0.4	0.4-1.5	0.75-2.2	2.2-7.5	7.5-22	22-75	55-150
	200-240VAC	HP	1/16-1/4	1/4-1	1/2-2	2-5	5-15	15-50	40-125
	380-440VAC	HP	1/8-1/2	1/2-2	1-3	3-10	10-30	30-100	75-200
Rated operating current of aux. contacts	Category 120VAC	A	2						
	AC-15 240VAC	A	1						
	Category 24VDC	A	1						
	DC-13 110VDC	A	0.2						
Permissible ambient temperature/humidity		°C/%RH	-10 to +55/45 to 85						
Control circuit consumption		VA	7.5 (AC100V)/15 (AC200V)						
Control voltage tolerance		times	0.85 to 1.1 (rated control voltage)						
Tripping time			See Fig. 2.2.1						
Tripping condition	Overload	%	[minimum tripping current] 110 to 120 (at setting current)						
	Phase failure	%	more than 70 (at setting current) [Tripping time : 2-4 sec.]						
	Reversal phase	%	more than 70 (at setting current) [Tripping time : less than 0.5 sec.]						
Withstand voltage		VAC	2500 [1 minute]						
Shock resistance	Vibration 10-55Hz	m/s ²	19.6						
	Sine wave pulse	m/s ²	49						
Conductor size	Main terminals	mm ²	2-14				3.5-22	5.5-60	14-200
	Control terminals	mm ²	1.25-2						


Note: ET-N relay cannot be used on DC circuit

• Characteristic Curves

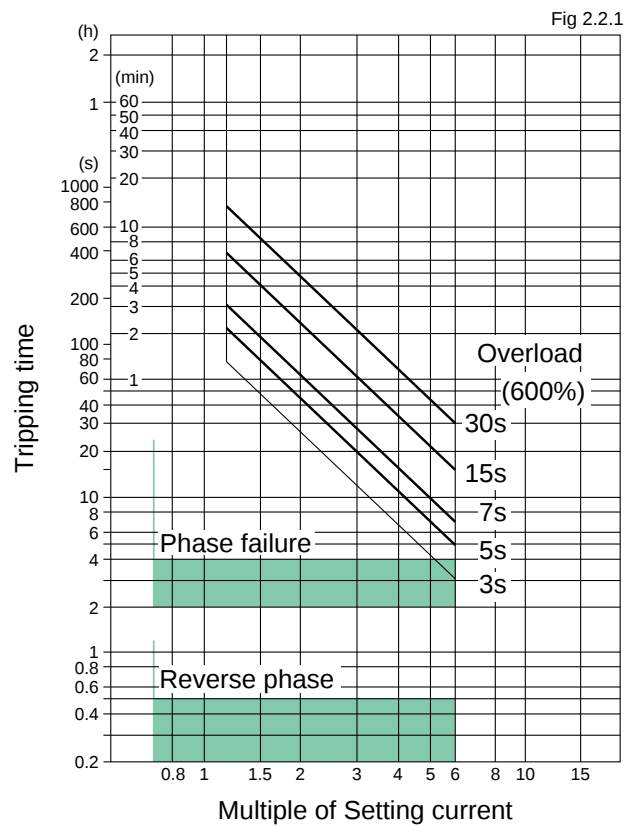

• Selection of Protection Mode & Tripping Time

Table 2.2.2

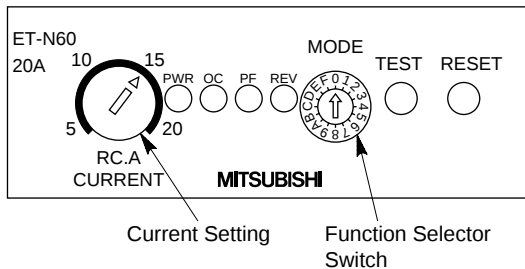


The selector switch is set at position "7" (overload and phase failure protection mode; standard trip type) when shipping. So please reset the position of the changeover switch according to Table 2.2.2 before installation.

Protection mode	Overload tripping time at 600% of setting(s)	Symbol on changeover switch
Overload, phase failure and reversal phase [3E]	3	0
	5	1
	7	2
	15	3
	30	4
Overload and phase failure [2E]	3	5
	5	6
	7	7
	15	8
Overload only [1E]	30	9
	3	A
	5	B
	7	C
	15	D
	30	E

• Application to High Voltage or Big Motor Circuit

The high voltage current transformer (secondary current: smaller than 5A: capacity: more than 5VA) should be connected to ET-N60*8A in the star connection, when the load is high voltage or big AC motor.


■ Wiring Precautions

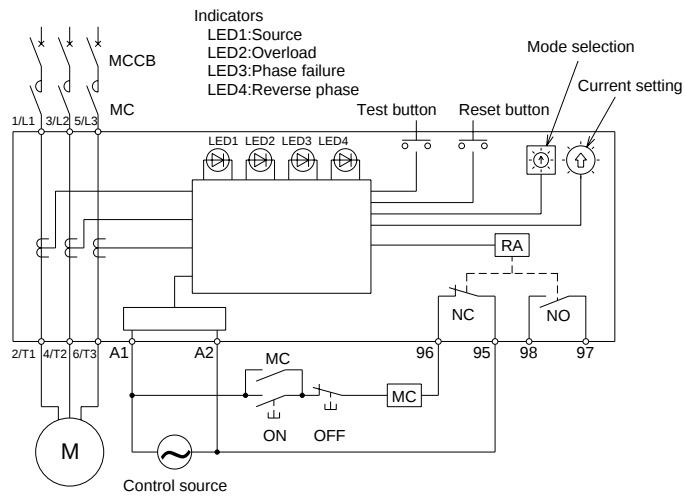


- The control source should be wired in the same phases as the contactor control source.
- When the load is a single phase motor, use 1/ L1-2/T1 and 5/L3-6/T3 phases.
And re-set the position of changeover switch to "A" to "E".

- If capacitors are used to correct the power factor, connect the capacitor in the power source side of the ET-N relay.


■ Outline Dimensions

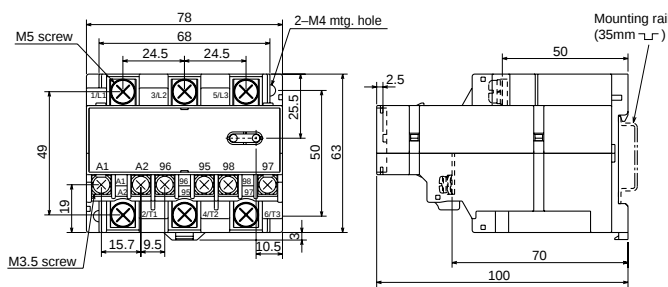

ET-N60(1-60A) (Mass: 0.3kg)

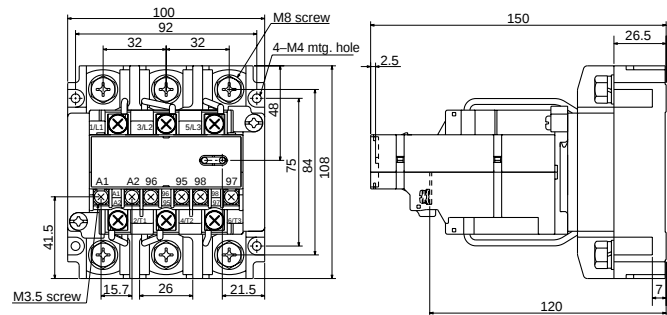

ET-N150 (Mass: 1.6kg)

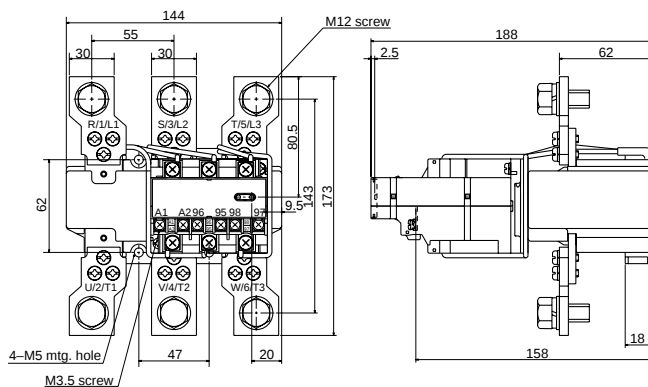

ET-N360 (Mass: 2.5kg)

3. DEFINITE PURPOSE CONTACTORS & STARTERS

3.1 DC Contactors

Series DU



DU-A60




DU-K180

The MITSUBISHI series DU contactors are designed for DC circuits, that is the variable-speed drive-control circuits (SCR switching circuit) and DC motor control circuits.

■ Features

- Compact design
- High break capacity
- CSA certified models are also available on AC operated type, add suffix "UR" immediately after the Frame size.
- Double break contacts
- UL recognized component (If  marking is required add suffix "UR" immediately after the Frame size).
- Long Life

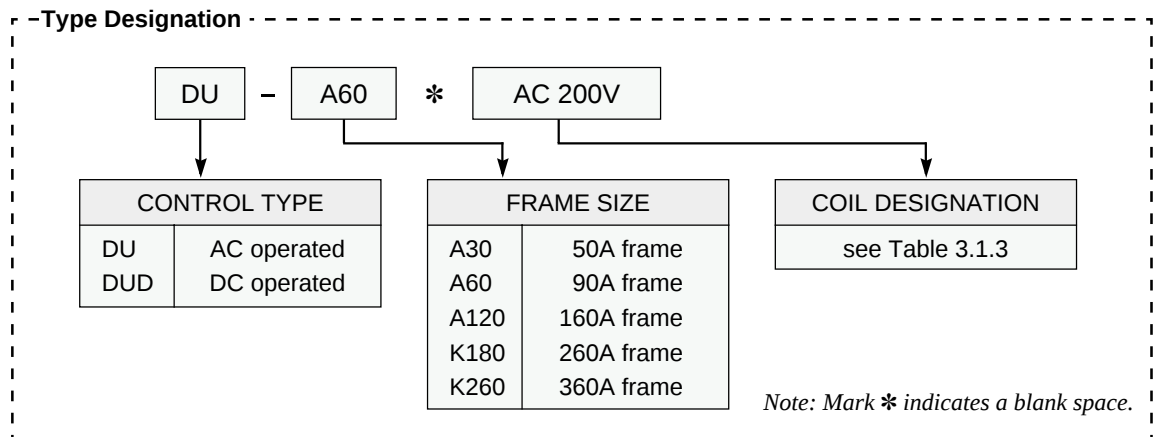

■ Specifications

- Number of main contacts type DU : 2NO1NC, type DUD : 2NO
Number of auxiliary contacts type DU & DUD : 2NO2NC

• Ratings

Table 3.1.1

Frame size				A30	A60	A120	K180	K260
Conventional free air thermal current			A	50	90	160	260	360
Rated operating current for SCR switching circuit*	NO contact	110VDC	A	40	80	160	260	360
		240VDC	A	40	80	160	260	360
		440VDC	A	15	30	60	90	130
		500VDC	A	15	30	60	90	130
1-pole 	NC contact	110VDC	A	120	240	480	720	1.040
		240VDC	A	120	240	480	720	1.040
		440VDC	A	120	240	480	720	1.040
		500VDC	A	120	240	480	720	1.040
Rated operating current for SCR switching circuit	NO contact	110VDC	A	50	90	160	260	360
		240VDC	A	50	90	160	260	360
		440VDC	A	40	80	160	260	360
		500VDC	A	40	80	160	260	360
2-pole 	NO contact	110VDC	A	30	60	120	180	260
		240VDC	A	20	40	80	120	175
		440VDC	A	7.5	15	30	—	—
		500VDC	A	7.5	15	30	—	—
Rated operating current category DC 2 & 4	NO contact	110VDC	A	30	60	120	180	260
		240VDC	A	20	40	80	120	175
		440VDC	A	7.5	15	30	—	—
		500VDC	A	7.5	15	30	—	—
1-pole 	NC contact	110VDC	A	20	40	80	100	150
		240VDC	A	15	30	60	75	100
		440VDC	A	7.5	15	25	—	—
		500VDC	A	7.5	15	25	—	—
Rated operating current category DC2 & 4	NO contact	110VDC	A	40	80	160	240	350
		240VDC	A	30	60	120	180	260
		440VDC	A	20	40	80	120	175
		500VDC	A	20	40	80	120	175
2-pole 	NO contact	110VDC	A	40	80	160	240	350
		240VDC	A	30	60	120	180	260
		440VDC	A	20	40	80	120	175
		500VDC	A	20	40	80	120	175
Rated operating current of aux. contacts	Category AC11	110VAC	A	6				
		240VAC	A	5				
	Category DC11	110VDC	A	1.2				
		240VDC	A	0.2				

Note: For SCR switching, making current of NO contacts is 2 times the rated operating current and making current of NC contact is 1 times, the rated operating current which means the peak value at making. In this application NO and NC contacts do not break any current.

• Characteristics

Table 3.1.2

Frame size				A30	A60	A120	K180	K260
Mechanical life			operations	2.5 million				
Electrical life			operations	0.5 million				
Permissible ambient temperature			°C	−10 to 55				
Coil voltage tolerance			times	0.85 to 1.1 (rated coil voltage)				
Coil consumption		Inrush Sealed Watts	VA VA W	240 28 7 (26)	520 47 13 (35)	1260 100 25 (50)	480 44 5(41)	480 54 7.3(55)
Operating time	Make	NO contacts ON NC contact OFF	msec msec	15 (60) 12	20 (100) 13	20 (140) 13	30(150) 26	40(180) 37
	Break	NO contacts OFF NC contact ON	msec msec	6(18) 12	11 (27) 18	11 (37) 18	110(25) 112	125(30) 135
Make and break capacity Category DC2 & DC4		Make Break	tmes times	4 (at the rated operating current) 4 (at the rated operating current)				
Permissible switching frequency			operations/hour	1,200				
Vibration resistance		10-55Hz	m/s ²	19.6				
Shock resistance		10 msec half sine wave	m/s ²	49				
Conductor size	Main terminals		mm ²	2-25	2-35	6-70	10-150	16-185
	Control terminals		mm ²	1-4			1-2.5	

Note: Parenthesized data is for type DUD, DC operated contactors.

• Coil designation

Table 3.1.3

Coils for type DU-A			Coils for type DU-K		Coils for type DUD	
Coil designation	Applicable voltage		Coil designation	Applicable voltage	Coil designation	Applicable voltage
	50Hz	60Hz				
AC100V	100VAC	100-110VAC	AC100V	100-127VAC 50/60Hz	DC24V	24VDC
AC120V	110-120VAC	115-120VAC			DC48V	48VDC
AC200V	200VAC	200-220VAC	AC200V	200-240VAC 50/60Hz	DC100V	100VDC
AC230V	220-240VAC	230-240VAC			DC110V	110VDC
			AC300V	260-350VAC 50/60Hz	DC120V¹	120VDC
AC400V	380-415VAC	400-440VAC	AC400V	380-440VAC 50/60Hz	DC125V	120-125VDC ²
AC440V	415-440VAC	460-480VAC			DC200V	200VDC
AC500V	500VAC	500-550VAC	AC500V	460-550VAC 50/60Hz	DC220V	220VDC

Notes: 1. Only for type DUD-A60
2. 125V DC for type DUD-A60


■ Spare parts

Table 3.1.4


Spare parts	Ordering designation
Main contact kits for DU-□ ¹	MAIN KIT DU-□ MAIN KIT DUD-□ Z926783G30 UN-AX150 DU-□-COIL AC-V DUD-□-COIL DC-V
Main contact kits for DUD-□ ²	
Auxiliary contact kits for DU(D)-A□ ³	
Auxiliary contact Units for DU(D)-K□ ⁴	
Coils for DU-□ ⁵	
Coils for DUD-□ ⁶	

Notes: 1. Contact kit of type DU consists of three moving contacts and six stationary contacts.
2. Contact kit of type DUD consists of two moving contacts and four stationary contacts.
3. Aux. contact kits of type DU(D)-A□ are all the same.
4. Aux. contact units of type DU(D)-K□, UN-AX 150 are the same as those of the standard series S-N contactors.
5. Coils for DU-K 180/K 260 are the same as S-N220/N300 each.
6. Coil for DUD-A30 includes only one coil. Other DC operated coils of type DUD include two coils.


Contact Arrangements



DU-A30, DU-A60, DU-A120
DU-K180, DU-K260




DUD-A30, DUD-A60
DUD-K180, DUD-K260

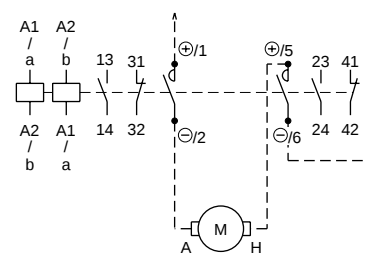

DUD-A120

Note: Values in parenthesis are shown on auxiliary terminals of DU-A  or DUD-A .

Outline Dimensions

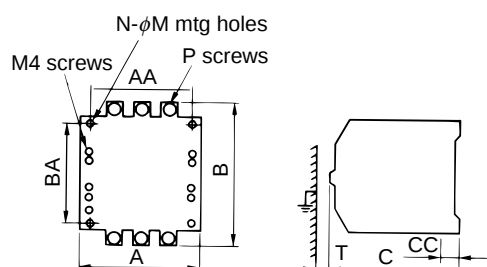

Type	A	AA	B	BA	C	CC	N	M	P	Mass(kg)	T
DU-A30	100	86	118	90	105.5	12.5	3	5	6	1.2	10
DU-A60	120	100	144	100	128.5	16	3	5	6	2.0	10
DU-A120	162	130	160	140	162	2.3	4	6	10	4.1	10
DU-K180	138	120	204	190	174	1.6	4	6	10	5.5	30
DU-K260	163	145	243	225	195	2.3	4	8	12	10	50
DUD-A30	101	86	108	90	135.5	3.2	3	5	6	2.1	10
DUD-A60	120	100	144	100	161.5	2	3	5	6	3.5	10
DUD-A120	162	130	160	140	187	2.3	4	6	10	7.1	10
DUD-K180	138	120	204	190	200	1.6	4	6	10	7.5	30
DUD-K260	163	145	243	225	220	2.3	4	8	12	13.5	50

● Characteristics

Table 3.2.2

Frame size			V160	V320	V400	V600
Mechanical life ^{1,2} .		operations	2.5 million			
Electrical life ^{3,4} .(category AC3)		operations	0.5 million			
Permissible ambient temperature		°C	-10 to +55			
Coil voltage tolerance		times	0.85 to 1.1(rated coil voltage)			
Coil consumption	AC operated	Inrush	VA	550	1150	
		Sealed	VA	45	55	
		Watts	W	5.2	7.3	
	DC operated	Inrush	VA	500	—	
		Sealed	VA	40	—	
	Mechanically latched	Inrush	VA	550	—	
Operating time(approx.)	Make	msec	40			65
	Break	msec	130			80
Make and break current capacity	Make	times	10(at AC3 rated operating current)			
	Break	times	8(at AC3 rated operating current)			
Permissible switching frequency		operations/hour	1,200			
Vibration resistance	10-55Hz	m/s ²	19.6			
Shock resistance	Sine wave pulse	m/s ²	49			
Conductor size	Main terminals	mm ²	5.5-100	14-200		70-325
	Control terminals	mm ²	1-2.5			

Notes: 1. Mechanical life of the latched type is 0.25 million operations.
 2. Mechanical life of vacuum tube is 1 million.
 3. When the load is three phase capacitors, electrical life is 0.1 million operations.
 4. Electrical life of the latched type is 0.25 million operations.

● Coil Designation

Table 3.2.3

Coil designation	Rated voltage
AC100V	100~127V 50/60Hz
AC200V	200~240V 50/60Hz
AC300V	260~350V 50/60Hz
AC400V	380~440V 50/60Hz
AC500V	460~550V 50/60Hz
DC100V	100-110 VDC
DC200V	200-220 VDC

Note: When ordering the latched type contactor, specify the coil designation of the closing coil and the tripping coil.
 Place "MC" before the closing coil designation and place "MT" before the tripping coil designation.

■ Spare Parts & Accessories

Table 3.2.4

Contactor Catalog Number	Coil Part Number ¹	Main Contact Part Number	Auxiliary Contacts Number		Vaccum Tube Gauge Part Number
			Replacement(1NO 1NC)	Add-on(2NO 2NC)	
SH-V160	SH-V160COIL AC V	SH-V160TUBES ²	UA-AXVV1	UA-AXVV2 ³	SH-V160 GAUGE
SH-V320		SH-V320TUBES ²			
SH-V400		SH-V400TUBES ²		UA-AXVV4	
SH-V600	SH-V600COIL AC V	SH-V600TUBES ²	SH-V600 GAUGE		

Notes: 1. See Table 3.3.3 for Coil Designation.
 2. Set of three vacuum bottles supplied.
 3. Consists of two UA-AXVV1 contact blocks on the mounting plate. Mounts on left side of contactor.


● Surge absorber

As the vacuum tubes of SH-V use a special contact material, the surge voltage by current chopping is very small. Surge absorbers are required only for motors smaller than 5.5kW.



Table 3.2.5

Applicable voltage	Ordering designation
up to 440VAC	UA-SU4
up to 550VAC	UA-SU5
up to 660VAC	UA-SU6
up to 1,000VAC	UA-SU10
up to 1,500VAC	UA-SU15

Contact Arrangement

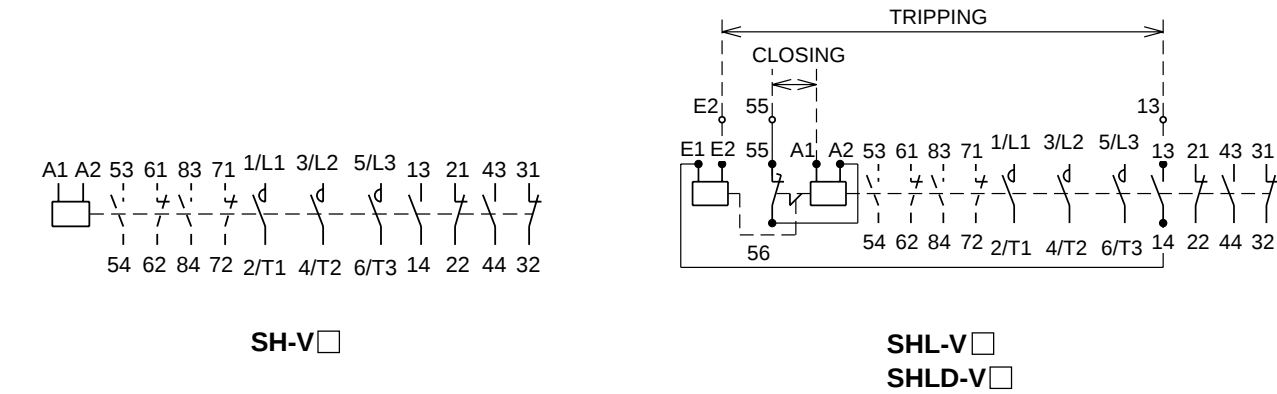

Outline Dimensions

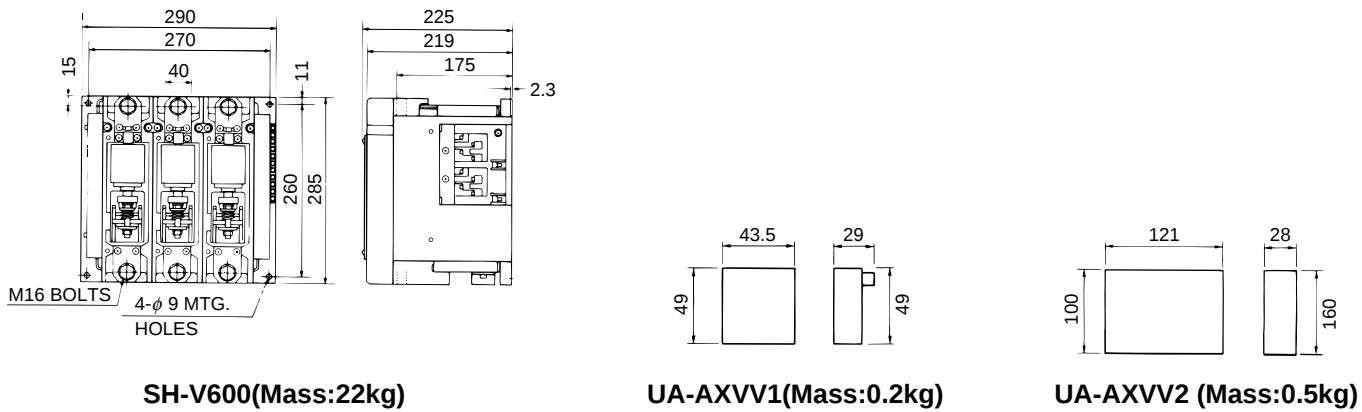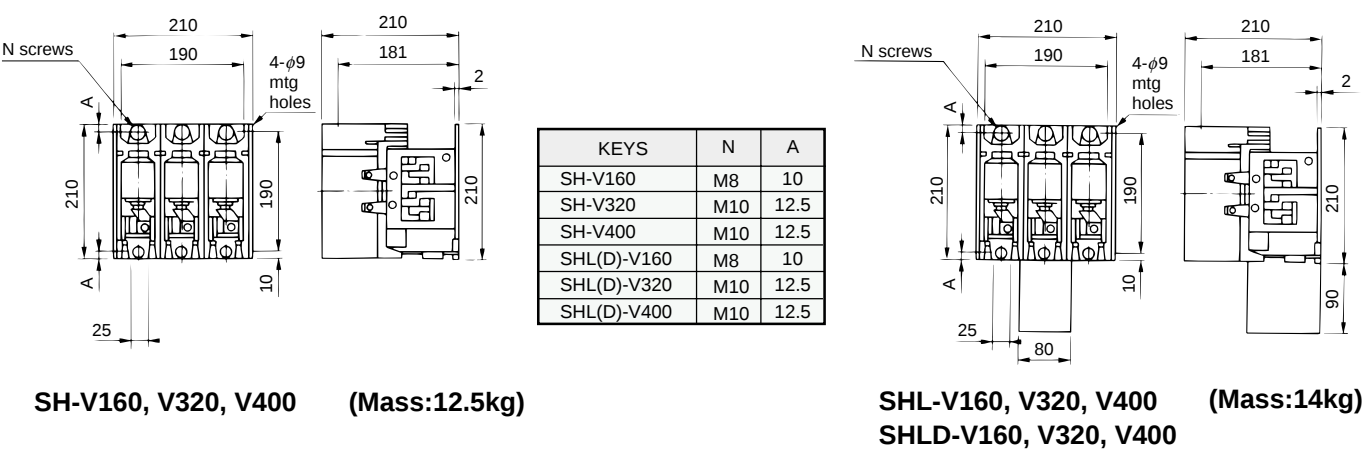

3.3 Compact 3-Pole Contactors

The MITSUBISHI series S-N $\square$ 8 compact 3-pole contactors are designed for limited panel space applications such as machine control panels.



S-N48

Features

- Compact design—Very limited required mounting space.
- Front clip-on type auxiliary contact block can be added.
- Coil surge absorbers are available. • Can be mounted on 35mm rail.

Type Designation

S	2X	N38	CX	*	AC 200V
REVERSING OR NON-REVERSING		FRAME SIZE	FINGER PROTECTION	COIL DESIGNATION	
None 2X	Non-reversing Reversing	See table 3.3.1	None CX	Not provided Provided	See Table 1.5.1 on page12

Note: Mark* indicates a blank space

Specifications



Rating and characteristics

Table 3.3.1


Type			S-N18 (CX)	S-N28 (CX)	S-N38 (CX)	S-N48 (CX)
Rated insulation voltage		V	AC690			
Rated operational current	220-240V	A(kW)	18(4.5)	26(7.5)	39(11)	50(15)
	380-440V	A(kW)	16(7.5)	17(7.5)	32(15)	40(18.5)
3-ph, category AC-3	500V	A(kW)	13(7.5)	13(7.5)	24(15)	32(18.5)
	690V	A(kW)	9(7.5)	9(7.5)	12(11)	17(15)
Conventional free air thermal current		A	25	30	60	80
Electrical life		operations (million)	1			
Mechanical life			10	5		
Rated making current for 100,000 cycle operations		A	200	300	500	670
Peak let through time 0.5ms						
Switching frequency(AC3)		operations/hour	1800	1800	1800	1200
Coil consumption (at rated coil voltage)	Inrush	VA	60		110	
	Sealed	VA	10		13	
	Watts	W	3		4 · 5	
Terminal screw size	Main terminal		M4	M4	M5	M5
	Control terminal		M3.5	M3.5	M3.5	M3.5
Conductor size (Compression terminal size)	Main terminal		1~6		2~16	
	Control terminal		1~2.5		1~2.5	
Additional auxiliary contact block			UN-AX2 or UN-AX4			

Note: 1. For finger protection type, order model name followed by suffix "CX".


Contact Arrangement

S-N $\square$ 8 (CX)S-2xN $\square$ 8 (CX)

Outline Dimensions

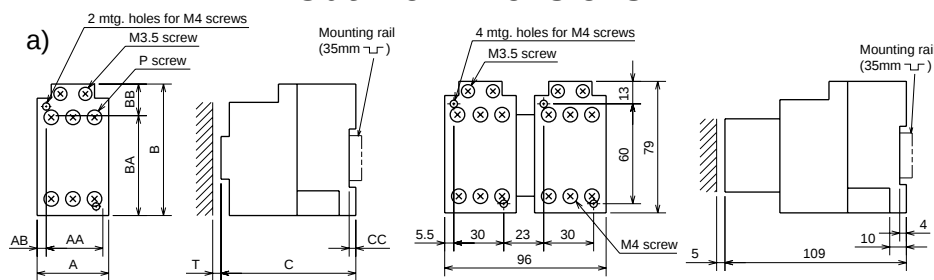

S-2xN18 (CX), N28 (CX)

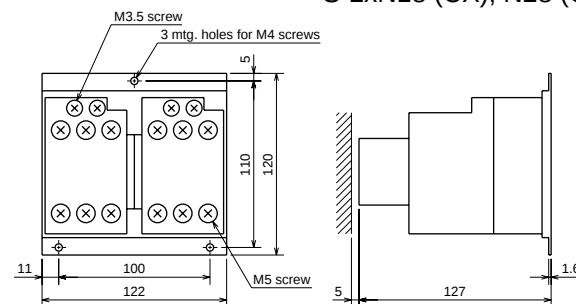

S-2xN38 (CX), N48 (CX)

	Fig.	A	B	C	AA	AB	BB	BA	CC	CA	D	P	Q	Mass(kg)	T
S-N18 (CX), N28 (CX)	a	43	79	81	30	7	60	6	10	109	4	M4	M3.5	0.33	5
S-N38 (CX), N48 (CX)	a	54	90	93	40	7	80	6	7	121	4	M5	M3.5	0.4	5

3.4 NC Main Contact Contactors



B-N20




B-A65

The MITSUBISHI series B-N/A contactors are specially designed for the dynamic braking circuit of motors, switching motor-starting resistors and switching of emergency lighting.

Features

- 2 or 3 NC main contacts.
- Suitable for a variety of loads.
- Compact design
- Both AC operated models & DC operated models

Type Designation

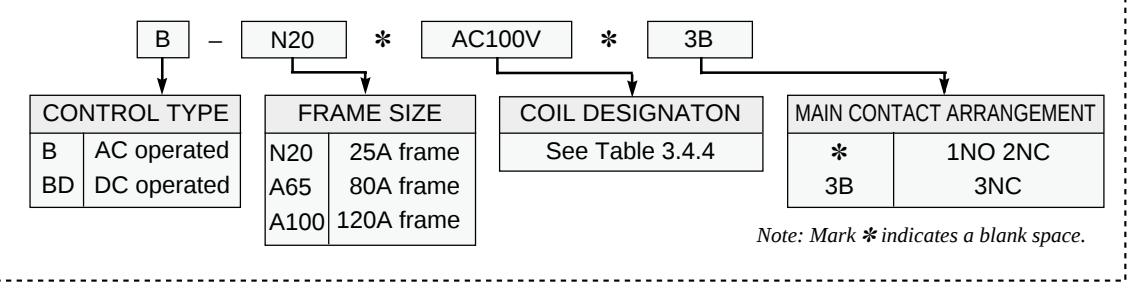

Specifications

- Number of main contacts: Special arrangement 3 NC can be supplied only with type B-N20/A65. aux. contacts: 2NO fixed.


Ratings

Table 3.4.1


FRAME SIZE				N20	A65	A100
Conventional free air thermal current		I _{th}	A	25	80	120
Rated operating current category AC-3	200-240VAC	A		18	50	80
	380-440VAC	A		13	35	55
Rated operating current category AC-1		max 500VAC		25	80	120
Rated operating current category DC-2 & DC-4	2NC ¹	110VDC	A	8	20	30
		220VDC	A	1	3	5
	3NC ²	110VDC	A	15	50	—
		220VDC	A	5	20	—
Rated operating current category DC-1	2NC ¹	110VDC	A	15	30	40
		220VDC	A	5	10	20
	3NC ²	110VDC	A	20	65	—
		220VDC	A	10	30	—

Notes: 1. At 2NC series connection
2. At 3NC series connection

Notes:1. At 2NC series connection



2. At 3NC series connection



Characteristics

Table 3.4.3

FRAME SIZE				N20	A65	A100
Mechanical life		Operations		5 million		
Electrical life		Operations		0.5 million		
Coil consumption	Inrush	VA		90 (–)	400 (–)	880 (–)
	Sealed	VA		15 (–)	40 (–)	76 (–)
	Watts	W		4 (16)	10.5(40)	19(45)
Coil voltage tolerance		times		0.85 to 1.1(at rated coil voltage)		
Operating time	Coil off → NC on	msec		20(50)	19(35)	18(35)
	Coil on → NC off	msec		20(50)	17(75)	19(125)
Make and break current capacity	AC-3	times		10(rated operating current)		
	DC-2 & DC-4	times		4(rated operating current L/R≤15 msec)		
Conductor size	Main terminals	mm ²		1-6	2-25	2-70
	Control terminals	mm ²		1-2.5		

Note: Parenthesized data if for type BD-□ DC operated contactors.

Rated operating current of aux. contacts.

Table 3.4.2

Category	Rated voltage	A
AC-15	120VAC	6
	240VAC	5
	440VAC	3
	500VAC	3
DC-13	48VDC	3
	110VDC	1.5
	220VDC	0.5

Coil Designation

Table 3.4.4

Coil designation	Applicable voltage
AC100V	100V/50Hz, 100-110V/60Hz
AC200V	200V/50Hz, 200-220V/60Hz
AC400V	400V/50Hz, 440V/60Hz
DC100V	100VDC
DC110V	110VDC
DC200V	200VDC


Coils for B(D)-N20 is same as one of S(D)-N21, refer to Table 1.8.1 of Page 18.

Spare Parts

Table 3.4.5


Spare parts	Ordering designation
Main contact kits for B(D)-N20 1NO2NC for B-N20 3NC for B(D)-A65 1NO2NC for B-A65 3NC for B(D)-A100	PARTS MAIN KIT B(D)-N20 1A2B BH739N301 B-N20 3B BH739N302 B(D)-A65 1A2B Z936083G10 B-A65 3B Z936084G10 B(D)-A100 Z936085G10
Auxiliary contact kits for B(D)-N20 for B(D)-A65/A100	PARTS AUX KIT B(D)-N20 BH739N312 B(D)-A65 Z936083G30
Coils for B-N20 or B-A □ AC operation for BD-N20 or BD-A □ DC operation	B-N20-COIL AC....V, B-A □ -COIL AC....V BD-N20-COIL DC....V, BD-A □ -COIL DC....V

Contact Arrangements

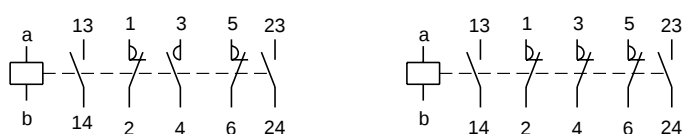

Note: 1. 3NC is available for B-N20 and B-A65 only.


Outline Dimensions

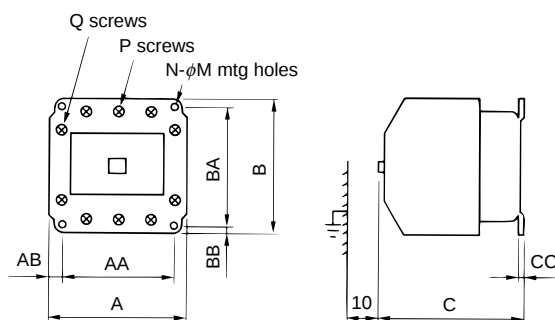

Type	A	B	C	AA	AB	BA	BB	CC	N	M	P	Q	Mass(kg)
B-N20	63	81	81	54	4.5	60	7	6.5	2	4.8	M4	M3.5	0.4
B-A65	120	116	128.5	100	10	100	8	16	3	5.8	M6	M4	2.0
B-A100	140	140	144.5	114	13	125	7.5	2	4	7	M8	M4	2.8
BD-N20	63	81	113	54	4.5	60	7	6.5	2	4.8	M4	M3.5	0.7
BD-A65	120	116	161	100	10	100	8	2	3	6	M6	M4	3.5
BD-A100	140	140	177.5	114	13	125	7.5	2	4	7	M8	M4	5.0

3.5 Heavy-Duty Clapper-Type Contactors

Series CD




CD-205BB

The MITSUBISHI series CD, heavy-duty clapper-type contactors are specially designed for the crane control or for the rolling mill control, where checking and maintenance are very important.

Features

- Long life under high switching-frequency operation
- Stable operation and high reliability
- Easy checking, maintenance and replacement
- Versatile construction of aux. Contacts
- Standardised mounting hole dimensions

Type Designation

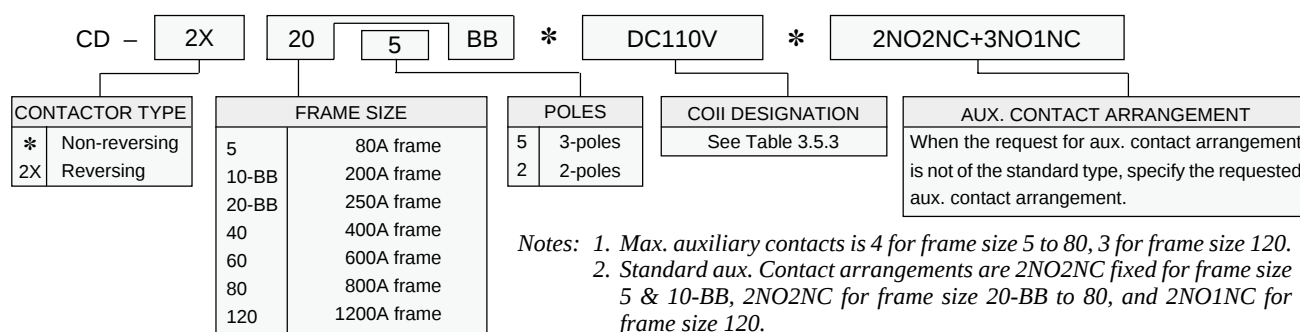

Specifications

• Ratings

Table 3.5.1

Frame size			3-poles	CD-55	CD-105BB	CD-205BB	CD-405	CD-605	CD-805	CD-1205
			2-poles	CD-52	CD-102BB	CD-202BB	CD-402	CD-602	CD-802	CD-1202
Rated insulation voltage			660							
Conventional free air thermal current			A	80	200	250	400	600	800	1200
Rated operating Current	Category AC-3	200-220VAC	A	80	200	250	400	600	800	1000
		380-440VAC	A	65	150	200	320	480	750	1000
		500-550VAC	A	50	80	140	280	420	600	1000
	Category AC-2	200-220VAC	A	80	200	250	400	600	800	1200
		380-440VAC	A	65	150	200	400	600	800	1200
		500-550VAC	A	65	100	200	400	600	800	1200
Rated operating Current	Category AC-1	Max.550VAC	A	70	110	220	400	600	800	1200
	Category AC-3	200-220VAC	KW	19	50	60	100	150	200	300
		380-440VAC	KW	30	70	100	150	250	400	500
		500-550VAC	KW	30	50	90	150	250	400	500
	Category AC-2	200-220VAC	KW	19	50	60	100	150	200	300
		380-440VAC	KW	30	70	100	200	300	400	600
		500-550VAC	KW	39	50	100	200	300	400	600
Rated operating Current	Category DC-4	100-110VDC	A	50	100	200	400	600	–	–
		200-220VDC	A	(50)	(100)	(200)	(400)	(600)	–	–
	Category DC-1	100-110VDC	A	65	100	200	400	600	–	–
		200-220VDC	A	(65)	(100)	(200)	(400)	(600)	–	–

Note: 1. Parenthesized data is applicable for 2 or 3 poles connections. Not for the single-pole application.

• Rated Operating Current of Aux. Contacts.

Table 3.5.2

Category	Rated voltage	A
AC-15	220VAC	10
	440VAC	6
	550VAC	5
DC-13	48VDC	5
	110VDC	3
	220VDC	1

• Coil Designation

Table 3.5.3

Coil designation	Applicable voltage
DC100V	100VDC
DC110V	110VDC
DC200V	200VDC
DC220V	220VDC

• Characteristics

Table 3.5.4

Item	Frame size	3-poles	CD-55	CD-105BB	CD-205BB	CD-405	CD-605	CD-805	CD-1205
		2-poles	CD-52	CD-102BB	CD-202BB	CD-402	CD-602	CD-802	CD-1202
Mechanical life		operations	10 million			0.5 million			0.25 million
Electrical life		operations	0.5 million					0.25 million	0.25 million
Coil consumption		w	50	50	60	110	120	120	260
Coil voltage tolerance		times	0.85 to 1.1(rated coil voltage)						
Operating time ³	Close ¹	msec	110(105)	190(175)	210(200)	260(240)	390(340)	390(340)	170(120)
	Open ²	msec	20(30)	40(50)	50(60)	40(60)	35(50)	35(50)	20(40)
Make and break capacity	AC ratings	Make Break	10(category AC-3) 8(category AC-3)						4 (category AC-2)
	DC ratings	Make & Break	4(category DC-2 & DC-4)						—
Permissible switching frequency		operations/hour	1200						600
Category conformed to	AC ratings	—	AC-3			AC-3		AC-3	AC-2
	DC ratings	—	DC-3			DC-3		—	—


Notes: 1 Time from coil ON to main contact ON.

2 Time from coil OFF to main contact OFF.


3 Parenthesized data is for the 2-poles types.

■ Contact Arrangements & Coil Connection Diagrams

• Contact arrangements




CD-55 ~ 805

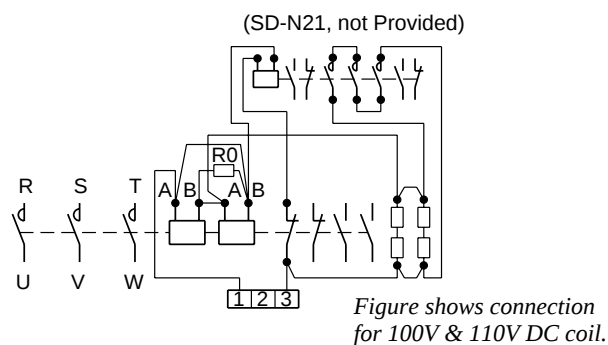


CD-1205

• Connection of coils for CD-55 ~ 1205



200VDC &
220VDC

100VDC &
110VDC

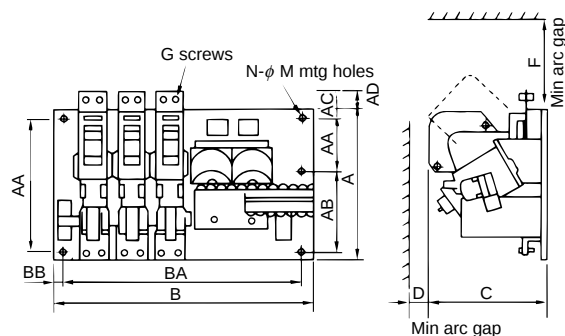

■ Outline Dimensions

Table 3.5.5

Type	A	AA	AB	AC	AD	B	BA	BB	C	D	E	F	G	N-M	Mass(kg)
CD-52	190	150	0	20	10	310	250	20	146	50	28	40	M6	3-11.5	8
CD-55	190	150	0	20	10	360	300	20	146	50	28	40	M6	3-11.5	9
CD-102BB	230	200	0	15	20	380	350	15	180	70	37	60	M8	4-11.5	16
CD-105BB	230	200	0	15	20	440	400	20	180	70	37	60	M8	4-11.5	18
CD-202BB	270	200	0	50	30	410	350	30	204	80	25	60	M10	4-11.5	24
CD-205BB	270	200	0	50	30	480	450	15	204	80	25	60	M10	4-11.5	29
CD-402	303	100	150	28	37	540	500	20	298	100	45	100	M12	5-11.5	45
CD-405	303	100	150	28	37	640	600	20	298	100	45	100	M12	5-11.5	54
CD-602,-802	365	100	200	40	35	600	550	25	327	150	47	140	M12	6-11.5	67
CD-605,-805	365	100	200	40	35	700	650	25	327	150	47	140	M12	6-11.5	79
CD-1202	400	150	150	75	—	700	650	25	327	170	55	170	M12	6-11.5	86
CD-1205	400	150	150	75	—	800	750	25	327	170	55	170	M12	6-11.5	106

3.6 Delay Open Type Magnetic Starters & Contactors

Series S/MSO-N□DL



MSO-N□DL

The MITSUBISHI series MSO-N□DL starters and S-N□DL contactors are specially designed to prevent instantaneous “drop-out” when connected to motors, resulting from momentary voltage drop or power interruption caused by lightening or similar.
A capacitor connected in parallel with the operating coil of the contactor discharges so that the starter or contactor will remain closed for 1 to 4 seconds.

Type Designation

MSO – N21 DL * 7.5kW * 380V * AC200V

TYPE

MSO Starter
S Contactor

FRAME SIZE

See Table 3.6.1

MOTOR LOAD CAPACITY

7.5kW

MAIN CIRCUIT VOLTAGE

380V

CONTROL CIRCUIT VOLTAGE

AC100V
AC200V

100-110V 50/60Hz
200-220V 50/60Hz

Note: Mark * indicates a blank space.


Specifications

Ratings and Characteristics


Table 3.6.1

Frame size				N12	N21	N35	N50	N65	N80	N95	N150	N220	N300	N400
Three phase motor	220-240VAC	kW		3.5	5.5	11	15	18.5	22	30	45	75	90	125
	380-440VAC	kW		5.5	11	18.5	22	30	45	55	75	132	160	220
	500-550VAC	kW		5.5	11	18.5	22	30	45	55	90	132	160	225
Category AC-3	220-240VAC	A		13	22	40	55	65	85	105	150	250	300	400
	380-440VAC	A		12	22	40	50	62	85	105	150	250	300	400
	500-550VAC	A		9	17	32	33	45	75	85	140	200	250	350
Conventional free air thermal current		Ith	A	20	32	60	80	100	135	135	200	260	350	450
Available aux. contacts				1NO1NC										
Holding time			sec.	2 ⁺² ₋₁										
Control circuit power consumption	Inrush	VA		21	40	44	55	55	66	66	76	100	140	140
	Sealed	VA		13	18	19	26	26	27	27	55	66	85	85

Diagrams Circuit

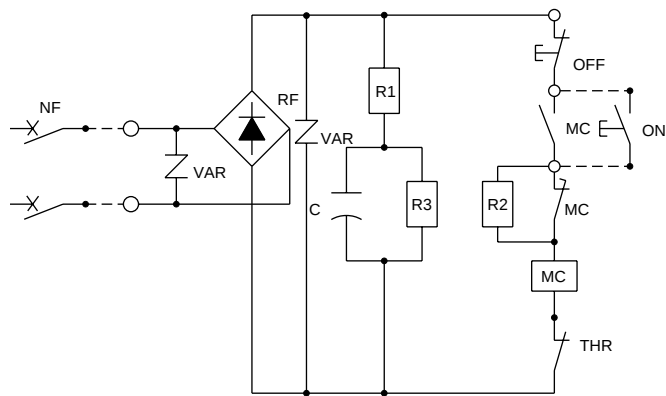

Typical Wiring Diagram

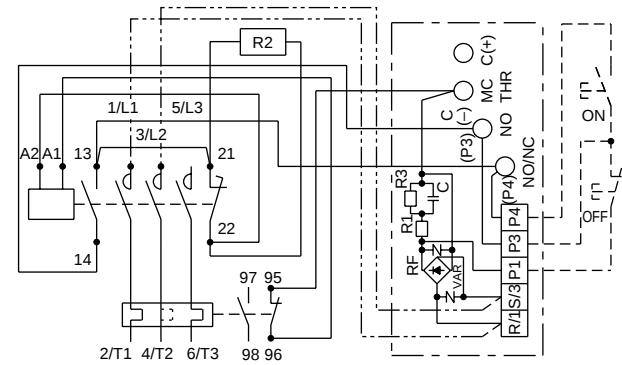


Note: R1-R1 & S3-S/3 (---) wiring is omitted if the control circuit voltage is 100VAC or the main circuit voltage differs from the control circuit voltage.

● Caution

- When the circuit breaker (NF) is made (ON) and disconnected (OFF) repeatedly within a short time interval [eg: when the instantaneous power failure occurs within a short time interval], electrical parts might be damaged or specified holding time might not be assured.
Causes; 1) Overload occurs by frequent inrush current to RF and R1.
2) Enough electricity is not charged into the capacitor (C).
- Even after the power is turned off (after the NF is disconnected), current might remain in the capacitor (C). So please take care to avoid the electrical shock, when you check or repair the system.

■ Outline Dimensions

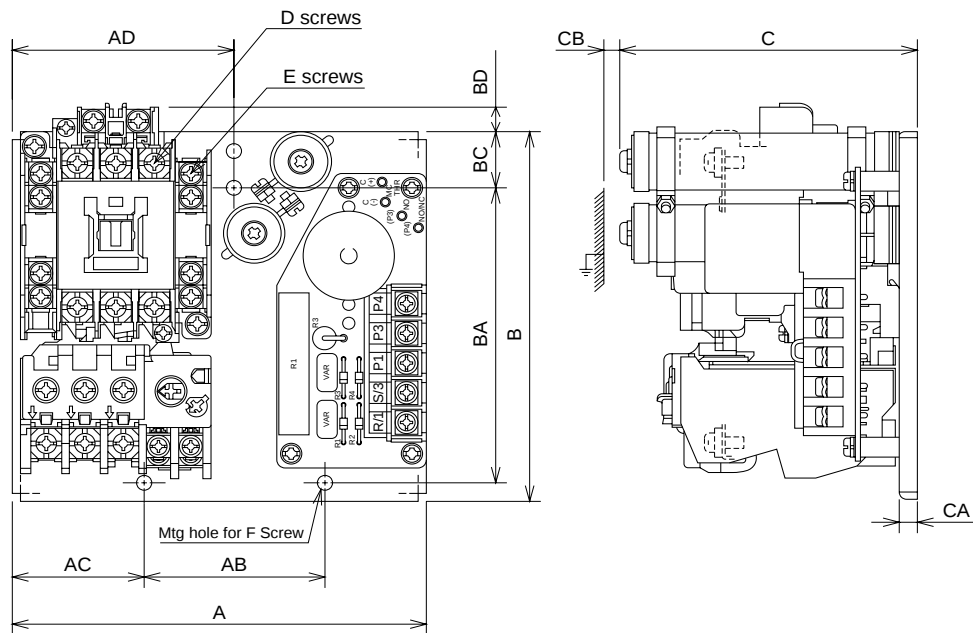

■ Dimensions

Table 3.6.2

Dimension Model	A	AB	AC	AD	B	BA	BC	BD	C	CA	CB	D	E	F
MSO-N12DL	132	40	49	69	110	100	5	12.5	98	6	5	M3.5	M3.5	3-M4
MSO-N21DL	137	60	43	73	125	100	19	11	98	6	5	M4	M3.5	3-M4
MSO-N35DL	134	50	42	67	162	150	6	23	114	8	5	M5	M3.5	3-M4
MSO-N50/65DL	150	50	56	81	168	150	9	26.5	141	8	10	M6	M4	3-M5
MSO-N80/95DL	170	100	35	85	220	200	10	39.5	165	8	10	M6	M4	3-M6
MSO-N150DL	210	140	26	105	270	250	10	33	177.5	8	30	M8	M4	3-M8
MSO-N220DL	230	140	20	90	290	250	12	21	208.5	8	30	M10	M4	3-M8
MSO-N300/400DL	300	200	10	—	361.5	200	25	30	229	8	50	M12	M4	4-M8

Notes: 1. Dimensions CB is the arc clearance.

2. Outline dimensions of S-N□DL are the same as those of MSO-N□DL, except for S-N300/N400DL. Dimension B of S-N300/N400DL is 250mm.

3.7 DC Interface Contactors

Series **SD-M**



The MITSUBISHI series SD-M contactors are specially designed to be directly driven by the transistor output (DC24V) of a programmable sequence controller, etc.

Features

- Low coil power consumption: By combining an electromagnet with permanent magnet, coil operating current is reduced to DC24V 60mA (1.5W) for SD-M11, M12 and 75mA (1.8W) for SD-M19.
- Compact construction: Width 45mm, Height 48mm, Depth 61mm in Type SD-M11
- Can be mounted on 35mm rail
- Operating indicator (LED)
- Coil surge absorber
- Bifurcated auxiliary moving contacts having high contact reliability
- Safty clear terminal cover
- Easy wiring: All terminals are in the same plane
- Integrated reversing contactor with mechanical and electrical interlock

Type Designation

• Non-reversing types

SD - M	11	* DC24V *	*
FRAME SIZE			
11	With 1 auxiliary contact		
12	With 2 auxiliary contacts		
19	With 2 auxiliary contacts		

• Reversing type

SD - MR12 * DC24V
SD - MR19 * DC24V

AUXILIARY CONTACT ARRANGEMENT	
*	Standard type: SD-M11 with 1NO, SD-M12/M19 with 1NO1NC
1B	Special type: SD-M11 with 1NC
2A	Special type: SD-M12/M19 with 2NO

Note: Mark * indicates a blank space.

Specifications

• Ratings & characteristics

Table 3.7.1

Type			SD	M11,M12,MR12	M19,MR19
Rated insulation voltage			V	660	660
Conventional free air thermal current			A	15	20
Rated operating current	Category AC3	200-240VAC 380-440VAC	A A	12 9	18 13
	Category AC1	200-440VAC	A	15	20
Rated 3ph motor capacity	Category (IEC) AC3	200-240VAC 380-440VAC	kW kW	3 4	4.5 5.5
Coil voltage tolerance			%	85-110	85-110
Coil consumption			W	1.5	1.8
Coil current			mA	60	75
Operating times	Make	mS	<50	<60	
	Break	mS	<20	<35	
Mechanical life			operations	10 million	10 million
Electrical life	Category AC3	operations	1 million	2 million	
	Category AC1	operations	0.5 million	0.5 million	
Permissible ambient temperature			°C	-10 to 55	-10 to 55
Switching frequency			operations/hour	1800	1800
Conductor size			mm ²	1 to 2.5	1 to 6 (Main) 1 to 2.5 (Control)

• Ratings of auxiliary contacts

Table 3.7.2

Rated insulation voltage			V	660
Rated continuous current			A	6
Rated operating current	Category	220VAC	A	2
	AC11	440VAC	A	1
	Small coil load(L/R=40mS)	24VDC	A	2
	Resistive load	24VDC	A	3
Mechanical Endurance			operations	10 million
Electrical Endurance			operations	0.5 million


Contact Arrangement & Wiring Diagram

Table 3.7.3

Type	Standard	Special
Non-reversing	Aux. 1NO	Aux. 1NC
	SD-M11	SD-M12 SD-M19
Reversing	Aux. 1NO1NC	Aux. 2NO
	SD-MR12	SD-MR19

Note: Coil terminal have polarity.

Outline Dimensions

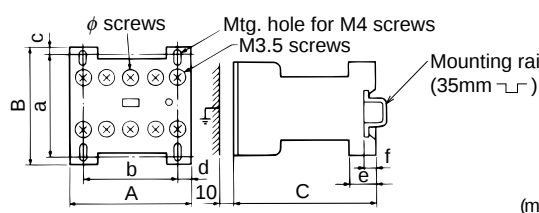

	A	B	C	a	b	c	d	e	f	P	Mass(kg)
SD-M11	45	48	61	40	35	4	5	9	3	M3.5	0.2
SD-M12	54	48	61	40	35	4	5	9	3	M3.5	0.2
SD-MR12	109	63	62	50	86	6.5	11.5	5.5	4	M3.5	0.45
SD-M19	66	58	77	50	55	4	5.5	9	3	M4	0.34
SD-MR19	133	80	78	50	110	22	11.5	9	3	M4	0.73

3.8 DC Interface Modules




The MITSUBISHI type UN-SY interface module is an optional unit for S-N series contactors or SR-N series relays, controlled by the transistor output of a programmable controller.

Features

- Easy mounting on the Type S-N10 to S-N65 contactors and SR-N series relays.
- Separate mounting type for the Type S-N80 to S-N400 contactors.
- Relay or solid state output versions are available.

Type Designation

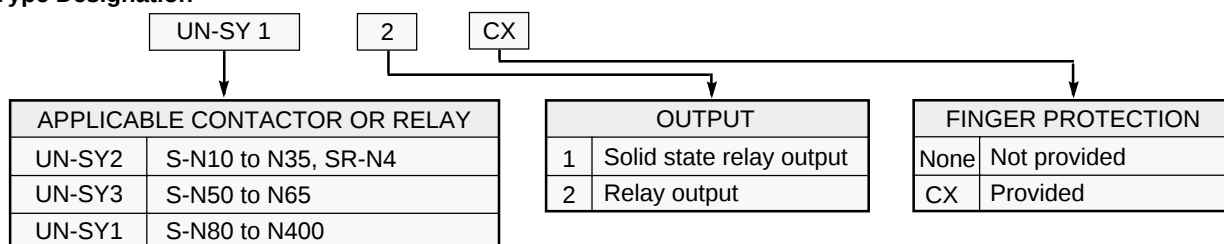

Note: Suffix "CX" is available only for UN-SY21 or SY22.


Specifications

Table 3.8.1




Type		UN-SY21(CX)	UN-SY31	UN-SY11	UN-SY22(CX)	UN-SY32	UN-SY12
Output		Solid state relay			Relay		
Applicable Type of contactor or relay	Direct mounting to contactor or relay	S-N10 to N35 S-N18, N28, N38, N48	S-N50, N65	—	S-N10 to N35 S-N18, N28, N38, N48	S-N50, N65	—
	Separate mounting	—	—	S-N80 to N400	—	—	S-N80 to N400
Input	Rated control voltage		24Vdc		24Vdc		
	Permissible voltage tolerance		80% to 110% of rated control voltage				
	Min. working voltage		18Vdc		18Vdc		
	Max. breaking voltage		4Vdc		1Vdc		
	Power consumption		0.4W		0.24W		
Output	Rated voltage		100Vac to 240Vac 50/60Hz				
	Rated operating current		0.5A (category AC11)				
	Responce time		11ms or less		10ms or less		
	OFF-state leakage current		3mA/240Vac		—		
	Mechanical life		—		5 million operations		
	Electrical life		—		1 million operations		
Ambient temperature		−10 to 55°C					

■ Connection

(1) Solid State Output

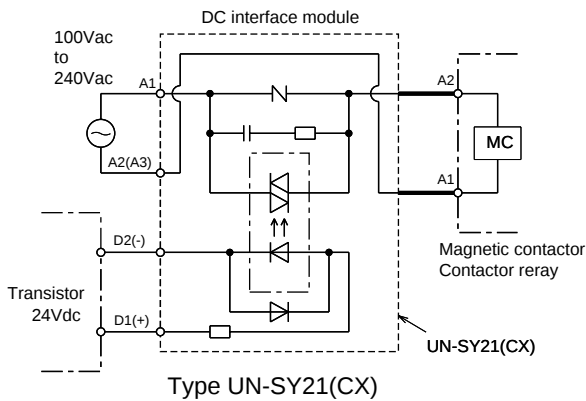

(2) Relay Output

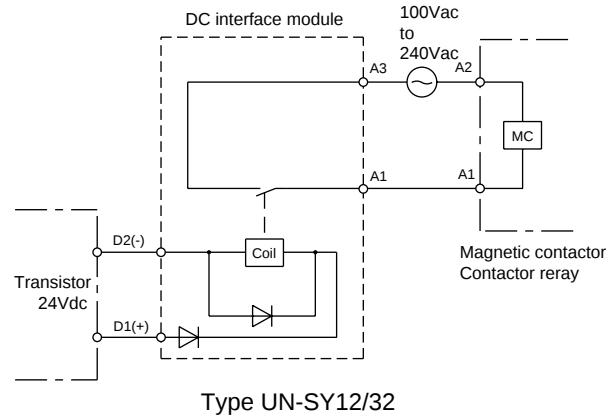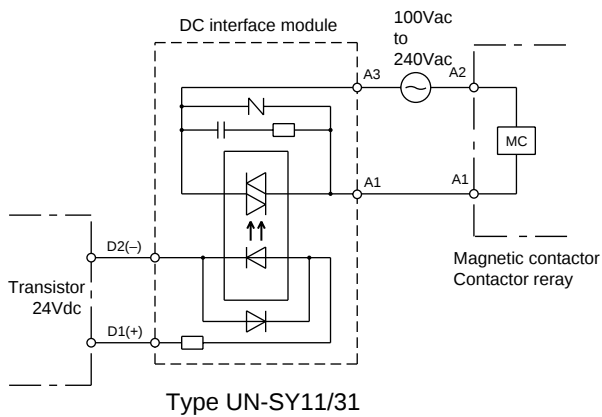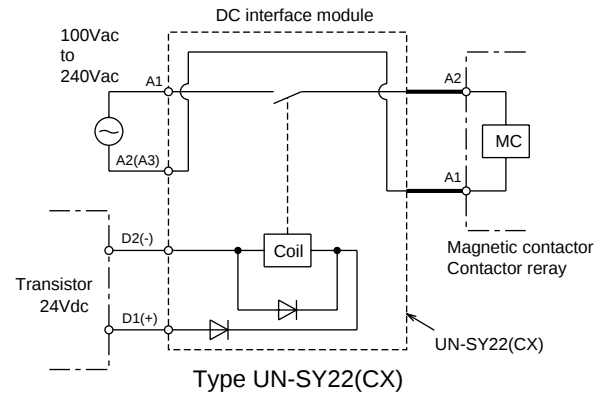

■ Mounting

- Direct mounting – Type S-N10 to S-N65 and SR-N4
Remove the coil terminal screw from the contactor or relay, then slide the tab on the interface module to the groove on the contactor or relay. Fasten the connecting conductor with the coil terminal screw.
- Separate mounting – Type S-N80 to S-N400
Mount the interface module (UN-SY11/12) with screw on a panel as follows.

■ Outline Dimensions

Type Number	UN-SY21/22(CX)	UN-SY-31/32	UN-SY11/12
Module Outline dimensions			
Overall Mounting dimensions	Coupling outline		
	Mtg. hole layout for separate mounting		

4. RELAYS

Series **SR-N**

4.1 Contactor Relays



SR-N4


The MITSUBISHI series SR-N contactor relays are specially designed for use in low voltage control circuit applications. Series SR-N have many superior features.

■ Features

- High reliability: By adopting bifurcated moving contacts and by improving the shape of the contacts, contact performance has been made more reliable than ever.
- Long life ● Can be mounted on 35mm rail ● Dust-proof construction
- Easily visible coil ratings ● Easy wiring (self-rising terminal screws)
- Various accessories common with the series S-N contactors
- (Head-and side clip-on type additional aux. contact blocks, surge absorbers, safety covers)
- Finger protected types are available (DIN 57106/VDE 0106 Part 100)

- - Type Designation

- **Standard types**

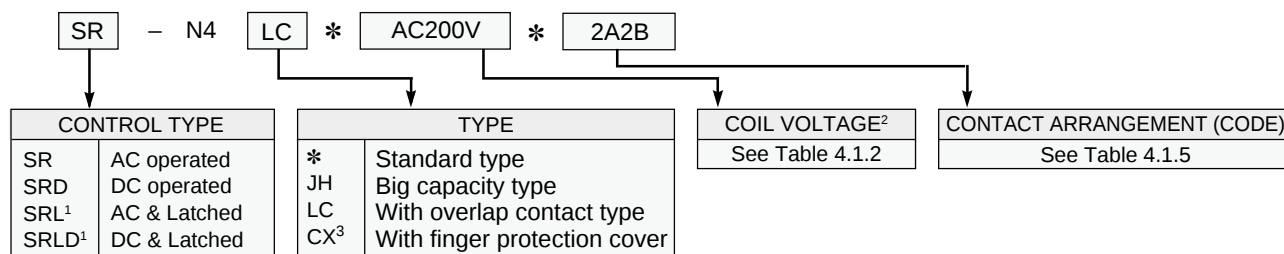

Notes: 1. For latched type relays, JH and LC types cannot be available.

2. When ordering the latched type relays, please specify the closing coil and tripping coil voltage.

ex: SRL-N4 * MC-AC200V * MT-AC100V * 4A
closing coil tripping coil

3. Only suffix "CX" is admitted to make any combination with other tabulated suffixes.

Note: Mark * indicates a blank space.

4.1.1 Specifications

Rating and characteristics

Table 4.1.1 (1)

Type			SR-SRD-	N4 (CX)	N4JH (CX)	N4LC (CX)
Available contact arrangements (code)				4NO (4A) 3NO+1NC (3A1B) 2NO+2NC (2A2B)	4NO (4A) 2NO+2NC (2A2B)	4NO (4A) 2NO+2NC (2A2B)
Rated insulation voltage			V	660		
Conventional free air thermal current lth			A	16	20	16
Rated operating current	Category AC-15 (coil load)	110VAC	A	6	10	6 (3) ²
		230VAC	A	5	10	5 (3) ²
		440VAC	A	3	5	3 (3) ²
		550VAC	A	3	4	3 (3) ²
	Category AC-12 (resistive load)	110VAC	A	16	20	16
		230VAC	A	12	16	12
		440VAC	A	5	10	5
		550VAC	A	5	10	5
	Category DC-13 (large coil load)	24VDC	A	5		3
		48VDC	A	3		2
		110VDC	A	0.8(2) ¹		0.5
		220VDC	A	0.2(0.8) ¹		0.1
	Category DC-14	24VDC	A	8		5
		48VDC	A	3		2
		110VDC	A	2(4) ¹		1
		220VDC	A	0.4(1) ¹		0.2
	Category DC-12 (resistive load)	24VDC	A	10		8
		48VDC	A	8		5
		110VDC	A	5(8) ¹		3
		220VDC	A	1(3) ¹		0.5
Mechanical life			Operations	10 million (latched type 1 million)		
Electrical life			Operations	0.5 million		
Permissible ambient temperature/humidity			°C/%RH	-25 to +55/45 to 85		
Coil consumption	Ac-operated	Inrush	VA	60		
		Sealed	VA	10		
	Watts	W	3			
	DC-operated	Watts	W	7		
Coil voltage tolerance			times	0.85 to 1.1 (rated coil voltage)		
Operating time (average)	Make	ms	ms	15 (AC)		50 (DC)
	Break			10 (operated)		10 (operated)
Switching frequency			operations /hour	1,800		
Vibration resistance	10-55Hz		m/s ²	19.6		
Shock resistance	10 msec. half sine wave		m/s ²	49		
Conductor size			mm ²	1.0 to 2.5		

Notes: 1. Parenthesized rated operating current is for switching the load in 2-pole series connection.

2. Parenthesized rated operating current is for switching of NC contact.

Coil voltage

Table 4.1.1 (2)


Coil designation	Rated voltage (AC)		Coil designation	Rated voltage (AC)		Coil designation	Rated voltage (DC)
	50Hz	60Hz		50Hz	60Hz		
AC12V	12V	12V	AC220V	208-220V	220V	DC24V	24VDC
AC24V	24V	24V	AC230V	220-240V	230-240V	DC48V	48VDC
AC48V	48-50V	48-50V	AC260V	240-260V	260-280V	DC100V	100VDC
AC100V	100V	100-110V	AC380V	346-380V	380V	DC110V	110VDC
AC120V	110-120V	115-120V	AC400V	380-415V	400-440V	DC125V	120-125VDC
AC127V	125-127V	127V	AC440V	415-440V	460-480V	DC200V	200VDC
AC200V	200V	200-220V	AC500V	500V	500-550V	DC220V	220VDC

Note: AC operated coils are the same as those of S-N10 etc., and DC operated coils are the same as those of SD-N11 etc.

4.1.2 Auxiliary Contact Blocks

Type Designation


• Front clip-on types

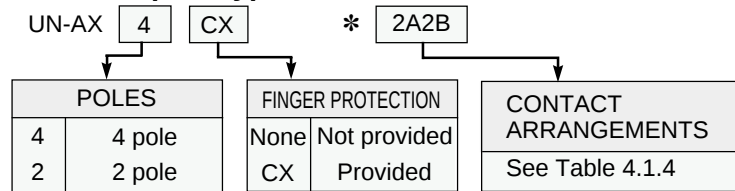

[FOR LOW SIGNAL LEVEL] UN-LL22 CX

FINGER PROTECTION	
None	Not provided
CX	Provided

• Side clip-on types



Note: Mark * indicates a blank space.

Ratings and characteristics

Table 4.1.2 (1)

Type			UN-	AX2 (CX)	AX4 (CX)	AX11(CX)	LL22 (CX)		
Applicable contact arrangements				2NO 1NO+1NC 2NC	4NO 3NO+1NC 2NO+2NC	INO+INC	1NO+1NC [Standard]	1NO+1NC ¹ [Low level]	
Rated insulation voltage			V	690				250	
Conventional free air thermal current			lth	A	16				1
Rated operating current	Category AC-15 (coil load)	110VAC	A	6				240VAC 20mA (COS φ ≧0.95) 48VDC 100mA (L/R≦1msec) Minimum operating current 5VDC 5mA	
		220VAC	A	5					
		440VAC	A	3					
	Category DC-13 (large coil load)	48VDC	A	3					
		110VDC	A	0.8					
		220VDC	A	0.2					
Mechanical life		operations	10 million				2.5 million		
Electrical life		operations	0.5 million				0.5 million		
Permissible ambient temperature/humidity			°C/%RH	-25 to +55/45 to 85					
Switching frequency			operations /hour	1,800					
Conductor size			mm²	1.0 to 2.5					

Note: 1. Contact reliability may be decreased if it is operated more than 1 million operations

Selection guide & contact arrangements













Table 4.1.2 (2)

Front clip-on types	UN-AX2 2A 2NO	UN-AX2 1A1B 1NO+1NC	UN-AX2 2B 2NC	UN-LL22 1NO+1NC, 1NO+1NC
	UN-AX4 4A 4NO	UN-AX4 3A1B 3NO+1NC	UN-AX4 2A2B 2NO+2NC	
Side clip-on types	UN-AX11 1NO+1NC			
	When mount on left side		When mount on right side 	

Note: Front clip-on types and side clip-on contact block should not be mounted both.

4.1.3 Contact Arrangements of Contactor Relay


Table 4.1.3

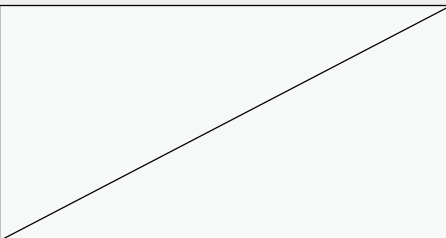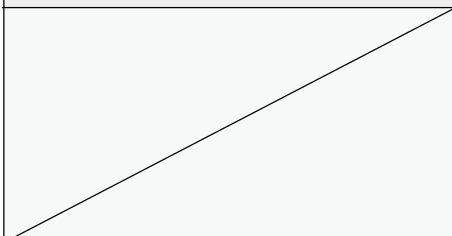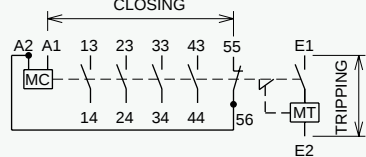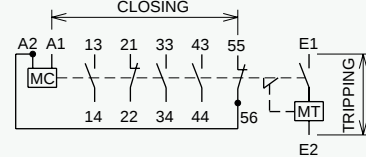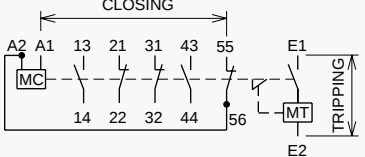With standard contacts		
4NO  SR-N4(CX)AC.....V 4A SRD-N4(CX)DC.....V 4A	3NO + 1NC  SR-N4(CX)AC.....V 3A1B SRD-N4(CX)DC.....V 3A1B	2NO + 2NC  SR-N4(CX)AC.....V 2A2B SRD-N4(CX)DC.....V 2A2B
With big capacity contacts		
4NO  SR-N4JH(CX)AC.....V 4A SRD-N4JH(CX)DC.....V 4A		
	2NO + 2NC  SR-N4JH(CX)AC.....V 2A2B SRD-N4JH(CX)DC.....V 2A2B	
With late break contacts		
		3NO + 1NC (late break)  SR-N4LC(CX)AC.....V 3A1B SRD-N4LC(CX)DC.....V 3A1B
		2NO + 2NC (late break)  SR-N4LC(CX)AC.....V 2A2B SRD-N4LC(CX)DC.....V 2A2B
With mechanical latching		
4NO  SRL-N4 AC.....V 4A SRLD-N4 DC.....V 4A	3NO + 1NC  SRL-N4 AC.....V 3A1B SRLD-N4 DC.....V 3A1B	2NO + 2NC  SRL-N4 AC.....V 2A2B SRLD-N4 DC.....V 2A2B

4.1.4 Spare Coils & Accessories

- Spare coils and accessories are common with the series S-N contactors.
- Spare coils See Table 1.8.1(except for Type SRL(D)latched relays)
 - Surge absorbers(suppressors) See Table 1.8.6

4.1.5 Outline Dimensions

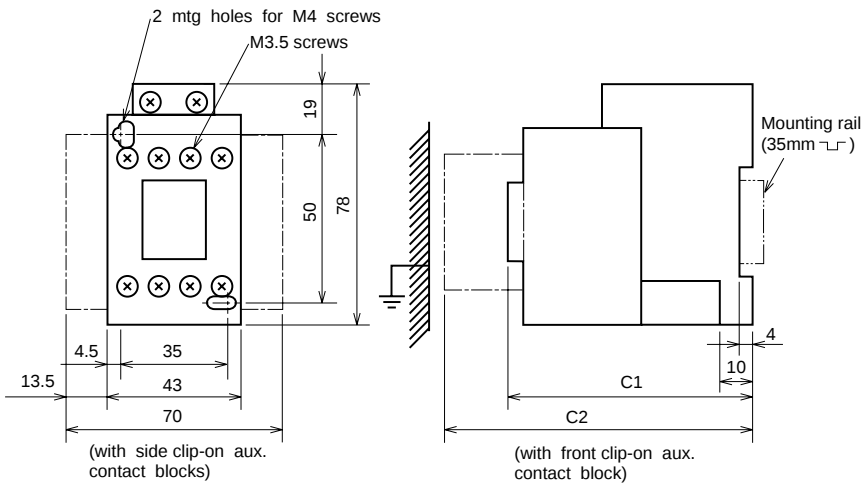

• Key to Dimensions

Model	C1	C2	Mass (kg)
SR-N4(CX)	78	106	0.3
SRD-N4(CX)	110	138	0.62
SRL-N4(CX) SRLD-N4(CX)	134	—	0.45

Note: Front clip-on and side clip-on contact block should not be mounted both.

4.2 Voltage Detection Relays




SRE-AA

The MITSUBISHI series SRE relays are specially designed for voltage sensing. The type SRE-A is specially designed for the detection of undervoltage or overvoltage conditions. The type SRE-K is particularly useful for the switching of automatic transfer panels. The type SRE-K can detect undervoltage by simply connecting to the power-source terminals.

Features

- High sensibility
- High reliability
- Easy wiring
- High surge tolerance
- Wide detective voltage range

Type Designation

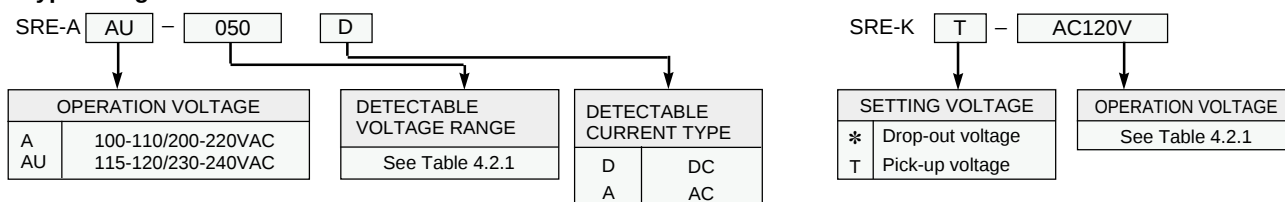

Specifications

Selection table


Table 4.2.1

Type		Detectable voltage range	Permissible input voltage (continuous)	Input impedance	Operation voltage
SRE-AA SRE-AAU	0P5D	0.1-0.5VDC	± 100VDC	20KΩ	Type SRE-AA 100-110V 50/60Hz 200-220V
	1P5D	0.3-1.5VDC	± 100VDC	50KΩ	
	005D	1- 5VDC	± 150VDC	100KΩ	
	015D	3-15VDC	± 150VDC	100KΩ	
	050D	10-50VDC	± 200VDC	500KΩ	
	150D	30-150VDC	± 300VDC	800KΩ	
	250D	50-250VDC	± 300VDC	800KΩ	Type SRE-AAU 115-120V 50/60Hz 230-240V
	015A	3-15VAC	150VAC	100KΩ	
	050A	10-50VAC	200VAC	500KΩ	
	150A	30-150VAC	300VAC	800KΩ	
SRE-K	AC100V	75-105VAC	120VAC	Input 1.8VA	100-110V, 50/60Hz
	AC120V	90-125VAC	132VAC		115-120V, 50/60Hz
	AC200V	150-210VAC	240VAC		200-220V, 50/60Hz
	AC240V	180-250VAC	264VAC		230-240V, 50/60Hz
	DC 12V	9-12.5VDC	14VDC	Input 1.7W	12VDC
	DC 24V	18-25VDC	28VDC		24VDC
	DC100V	75-105VDC	120VDC		100VDC
SRE-KT	AC100V	80-115VAC	120VAC	Input 1.8VA	100-110V, 50/60Hz
	AC120V	95-130VAC	132VAC		115-120V, 50/60Hz
	AC200V	160-230VAC	240VAC		200-220V, 50/60Hz
	AC240V	190-260VAC	264VAC		230-240V, 50/60Hz
	DC 12V	10-14VDC	14VDC	Input 1.7W	12VDC
	DC 24V	20-28VDC	28VDC		24VDC
	DC100V	80-115VDC	120VDC		100VDC

Note: The type SRE-A D, for DC detection can be used for full-wave rectification voltage.

Operating Condition

Fig 4.2.1

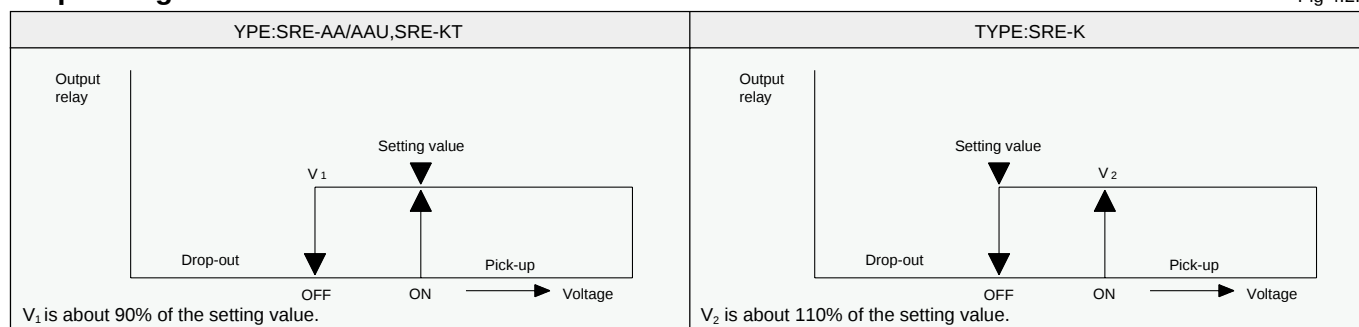

● Ratings and characteristics


Table 4.2.2

Type				SRE-A		SRE-K	
Output contact arrangement				1 changeover			
Conventional free air thermal current			Ith	A	3		
Rated operating current of output contact	Category AC-15	110VAC		A	1.5		
		220VAC		A	1.0		
	Category DC-13	24VDC		A	1.0		
		110VDC		A	0.2		
Accuracy	Repetitive operation ¹			%	±1		
	Control voltage fluctuation			%	±1.5	—	
	Ambient temperature change			%	±2.5		
Response time(at 150% of the rated voltage)				msec	100 to 200		
Mechanical life				operations	10 million		
Electrical life				operations	0.25 million		
Permissible ambient temperature/humidity				°C/ %RH	-10 to +55/max. 85		
Power consumption				VA	2		
Operation voltage tolerance (ambient temperature 40°C)				%	85 to 110	—	
Withstand voltage				VAC	1500 [1 minute]		
Insulation resistance (500VDC insulation tester)				MΩ	min. 100		
Vibration resistance		10 to 55Hz		m/s ²	19.6		
Shock resistance		10msec half sine wave		m/s ²	98		


Note: 1. Repetitive operation accuracy (%) = $\pm \frac{1}{2} \times \frac{\text{max. measurement} - \text{min. measurement}}{\text{max. scale value}} \times 100$.

■ Wiring precautions

Fig 4.2.2

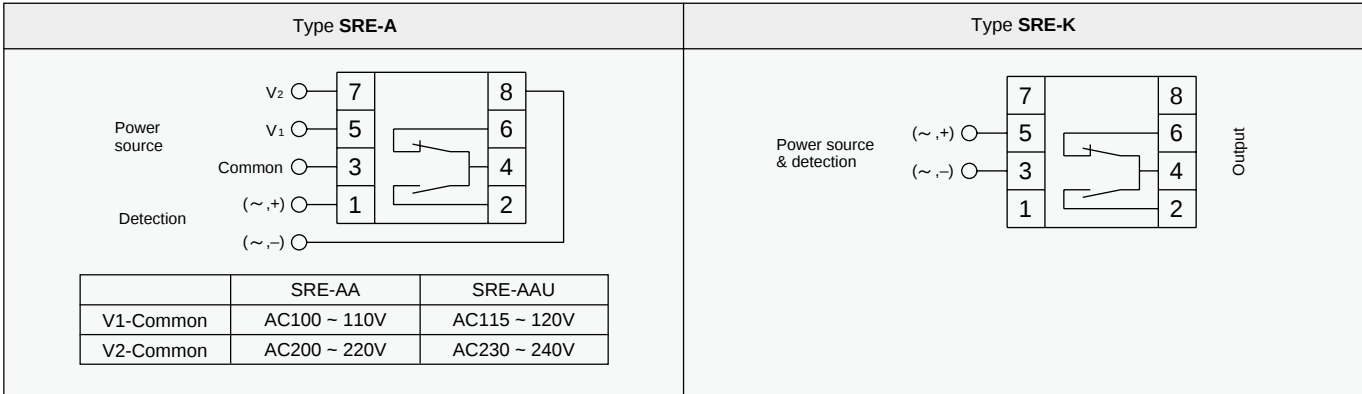

■ Outline dimensions

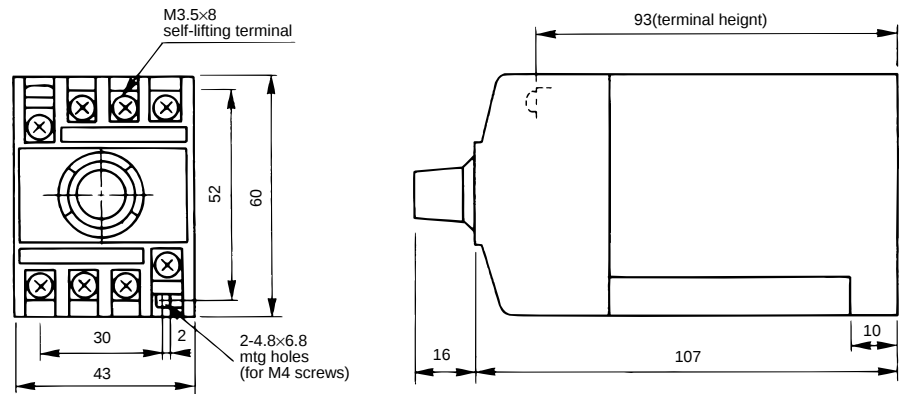

4.3 Re-Starting Relay



UA-DL2 with PF-08RM

The MITSUBISHI series UA-DL re-starting relays are specially designed for automatic re-starting. When the power recovers from an instantaneous power failure or voltage drop the UA-DL re-starts the stopped equipment or machines.

Features

- Easy installation and easy wiring
- Compact design
- Versatility of the control voltage (100VAC & 200VAC)
- Indicator lamp is provided.
- Selectable permissible max. power failure time (1sec. & 2sec.).

Type Designation

UA-DL2 * AC100/200V

SOCKETS type: PF-08RM/08TM

See page 66

CONTROL VOLTAGE	
Ordering designation	Rated control voltage (50/60Hz)
AC100/200V	100-110/200-220VAC
AC100V	100-110/110-120VAC
AC200V	200-220/220-240VAC

Notes: 1. DC control voltage type is not available.
2. Mark * indicates a blank space.

Specifications

• Ratings & characteristics

Table 4.3.1


Output contact arrangement				1 NO
Rated operating current of output contact	Category	110VAC	A	1.5
	AC-15	220VAC	A	1.0
Selection of permissible max. power failure time			sec.	1 and 2
Accuracy	Set permissible power failure time		%	−20 to +50
	Control voltage fluctuation		%	±35
	Ambient temperature change		%	±25
Minimum energizing time			sec.	1
Electrical life			operations	0.5 million
Permissible ambient temperature/humidity			°C/ %RH	−10 to +55/max. 85
Control voltage tolerance			%	85 to 110 (rated control voltage)
Power consumption			VA	3
Vibration resistance		10 to 55Hz	m/s ²	19.6
Shock resistance		10 msec. half sine wave	m/s ²	98
Withstand voltage			VAC	2000 (50/60Hz 1min.)
Insulation resistance			MΩ	min. 100

Note: 1. When shipping, permissible power failure is set to 2 secs.

When the required re-setting time is 1 sec., please turn the time setting dial to left until it stops.

When you want the permissible power failure time longer than 2 sec., please consult with MITSUBISHI.

● Connection diagrams

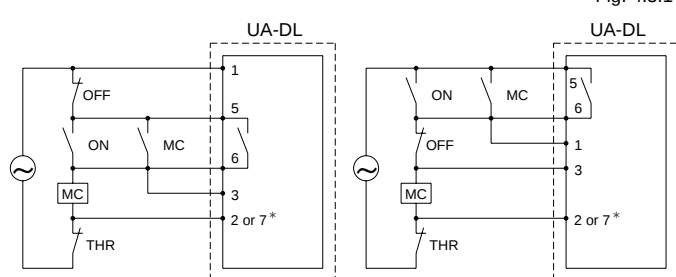


Connection of control switch differs in the above 2 connection diagrams.

* Selection table of terminals


Control voltage	AC100/200V	AC100V	AC200V
Terminal No.			
2	100-110VAC	100-110VAC	200-220VAC
7	200-220VAC	110-120VAC	220-240VAC

● Operation characteristics

Fig. 4.3.2

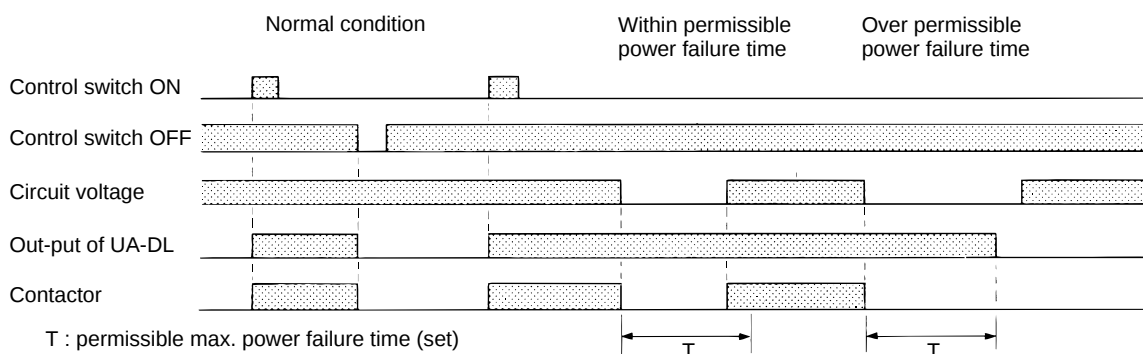


■ Outline Dimensions

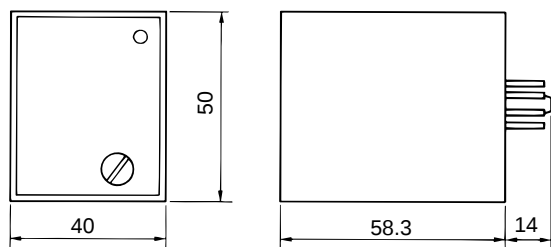


UA-DL2 (Mass: 0.1kg)

Note: 2 pcs of locking springs are enclosed in the each package of UA-DL.

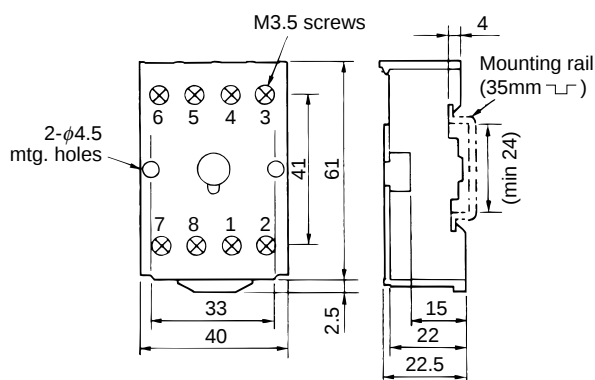

PF-08RM (Mass: 0.05kg)

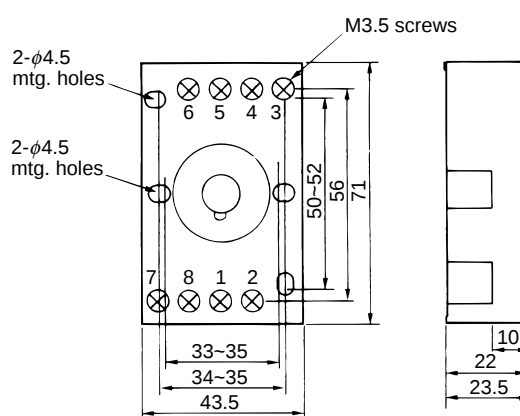

PF-08TM (Mass: 0.05kg)

4.4 Solid State Time Delay Relays

Series **SRS-H**




SRS-HNPS

The MITSUBISHI series SRS-H solid state time delay relays are specially designed for high accuracy and easy mounting.

■ Features

- High accuracy
- Compact design
- High reliability
- Easy mounting (for direct panel mounting or mounting on 35mm rail)
- With finger protection (terminal cover) model is available
- 1 delayed & 1 instantaneous changeover contact for ON-delay relay.

Type Designation

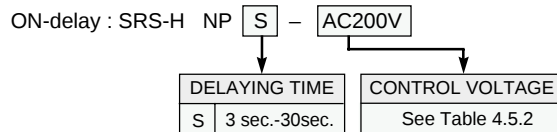

■ Specifications

• Time delay selection

Table 4.5.1

Relay type		Adjustable time range	Contacts
ON-delay	SRS-HNPS	3 sec. - 30 sec.	1 delayed and 1 instantaneous changeover

• Control voltages

Table 4.5.2


Ordering designation	Rated voltage
AC100V	100-120V 50/60Hz
AC200V	200-240V 50/60Hz
AC400V	380-440V 50/60Hz

• Rating & characteristics


Table 4.5.3

Type				ON-delay
Conventional free air thermal current		A		2
Rated operating current	Category	120VAC	A	1.5
	AC-15	240VAC	A	1
		440VAC	A	0.3
Accuracy	Repetitive operation	%		±0.5
	Control voltage fluctuation	%		±1
	Ambient temperature change	%		±5
Minimum pause time		msec.		100
Mechanical life		operations		10 million
Electrical life		operations		0.1 million
Permissible ambient temperature		°C		-10 to 55
Permissible ambient relative humidity		%RH		45 to 80
Control voltage tolerance		%		85 to 110 (rated control voltage)
Power consumption	Control voltage	AC	VA	5 (AC100V/AC200V) 10 (AC400V)
Vibration resistance		10-55Hz	m/s ²	19.6
Shock resistance		10msec half sine wave	m/s ²	49
Withstand voltage		[live parts to ground]	VAC	2000 (1 min.)

• Internal wiring



■ Outline Dimensions

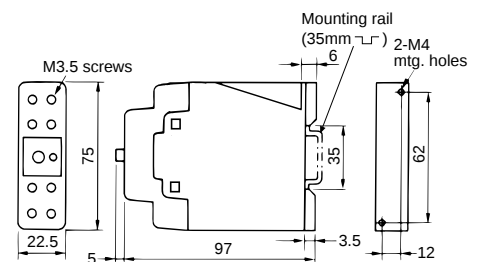

SRS-HNPS (Mass: 0.15kg)

4.5 Pneumatic Time Delay Relays

Series SRT-N




The MITSUBISHI series SRT pneumatic time delay relays are designed for general purpose time delaying, such as star-delta starters and transfer panels.

■ Features

- Easy delaying time adjustment
- Can be mounted on 35mm rail
- High contact reliability: By using bifurcated moving contacts, contact performance has been made more reliable than ever.
- Finger protected types are available
- Manual testing
- 2 delayed contacts (1NO1NC) & 4 instantaneous contacts (2NO2NC)

SRT-NN

Type Designation

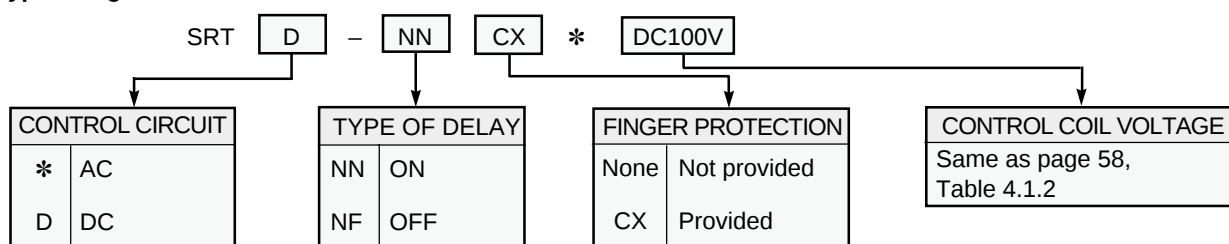

Note: Mark * indicates a blank space.

■ Specifications


• Ratings & characteristics

Table 4.6.1

Adjustable delay time range			sec.	0.1 to 60	
Type of contacts			—	Delayed	Instantaneous
Conventional free air thermal current I _{th}			A	10	16
Rated operating current	category	110VAC	A	5	6
		220VAC	A	3	5
		440VAC	A	1	3
		550VAC	A	1	3
	category	110VAC	A	6	16
		220VAC	A	4	12
		440VAC	A	1.5	5
		550VAC	A	1.5	5
	category	24VDC	A	1	5
		48VDC	A	0.5	3
		110VDC	A	0.3	0.8
		220VDC	A	0.15	0.2
category	24VDC	A	2	10	
	48VDC	A	1	8	
	110VDC	A	0.6	5	
	220VDC	A	0.3	1	
Rated insulation voltage			VAC	660	
Mechanical life			operations	1 million	
Electrical life			operations	1 million	0.5 million
Repeat accuracy			%	±10	
Min. pause time			msec.	500	
Min. energizing time	AC operated		msec.	15	
	DC operated		msec.	30	
Permissible ambient temperature			°C	−5 to 55	
Control coil voltage tolerance			%	85 to 110	
Make and break capacity (at rated operating current)	AC		times	11	
	DC		times	2	
Average operating times	AC operated	Make	msec.	—	11
		Break	msec.		10
	DC operated	Make	msec.	—	45
		Break	msec.		10
Coil consumption	AC operated	Inrush	VA	50	
		Sealed	VA	10	
	DC operated		W	7	
Switching frequency			operations /hour	1,800	
Vibration resistance 10-55Hz			m/s ²	19.6	
Shock resistance 10msec. half sine wave			m/s ²	49	
Conductor size			mm ²	1.0 to 2.5	


■ Contact arrangement

Table 4.6.2

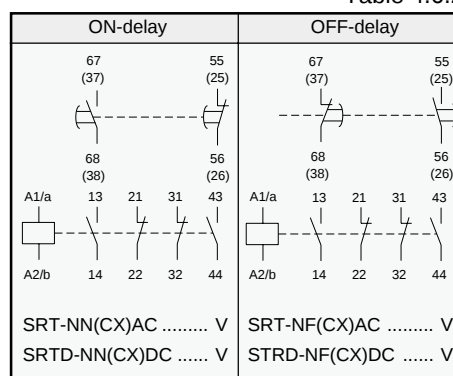

- Notes: 1. 13-14, 43-44 Instantaneous NO contacts
 23-24, 33-34 Instantaneous NC contacts
 55-56, 65-66 Delayed NC contacts
 57-58, 67-68 Delayed NO contacts
 2. Aux. contact block should not be mounted.

• Delay time characteristics

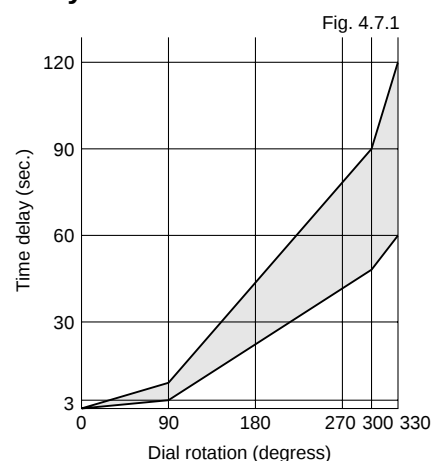


Pneumatic Time Delay Modules



UN-TR4AN

Type UA-TR pneumatic time delay modules are designed for attachment to series S-K contactors and SR-K contactor relays.

Type Designation

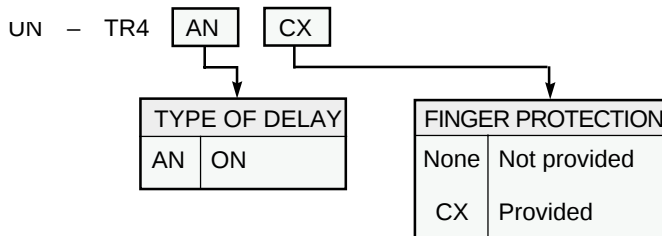


Applicable contactor and relay selection

Table 4.6.3

Type	Type of delay	Applicable contactors and relays	
UN-TR4AN(CX)	ON delay	AC operated	S-N10(CX),N11(CX),N18(CX) SR-N4(□□)(CX)
		DC operated	SD-N11(CX) SRD-N4(□□)(CX)

Note: When this module is mounted, aux. contact block should not be mounted.

Contact arrangement



Note: 55-56 Delayed NC contacts
67-68 Delayed NO contacts

Ratings & characteristics

..... See delayed contacts of Table 4.7.1



Delay time characteristics

..... See Fig.4.7.1

Key to Dimensions

Type	A	B	Mass(kg)
SRT-NN(CX), -NF(CX)	121.5	—	0.36
SRTD-NN(CX), -NF(CX)	153.5	—	0.68
UN-TR4AN(CX)	—	48.5	0.06

Outline Dimensions

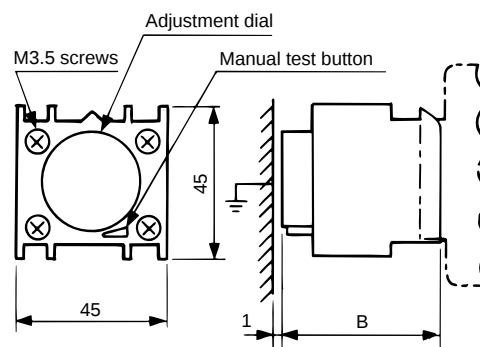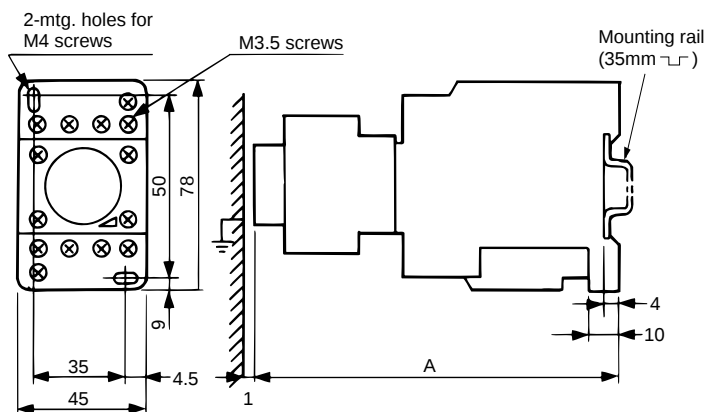


5.2 Specifications

• Characteristics

Table 5.2

Item	Frame size	N20	N35	N50	N65	N80	N95	N125	N150	N220	N300
Mechanical life	operations	1 million									
Electrical life	operations	0.25 million									
Permissible and temp.	°C	-25 to 55									
Coil consumption											
At star connection	VA	35	33	35	40	48	66	85			
At delta connection	VA	35	31	39	49	57	93	113			
Coil voltage tolerance	%	85 to 110(rated coil voltage)									
Couductor size											
Line side	mm ²	4-16	4-25	6-35	10-50	10-70	16-95	16-120	16-150	16-210	70-300
Motor side	mm ²	2.5-6	2.5-10	4-25	4-25	6-35	6-35	10-70	16-95	16-150	35-200
Control terminal	mm ²	1-2.5	1-2.5	1-2.5	1-2.5	1-2.5	1-2.5	1-2.5	1-2.5	1-2.5	1-2.5

• Connection

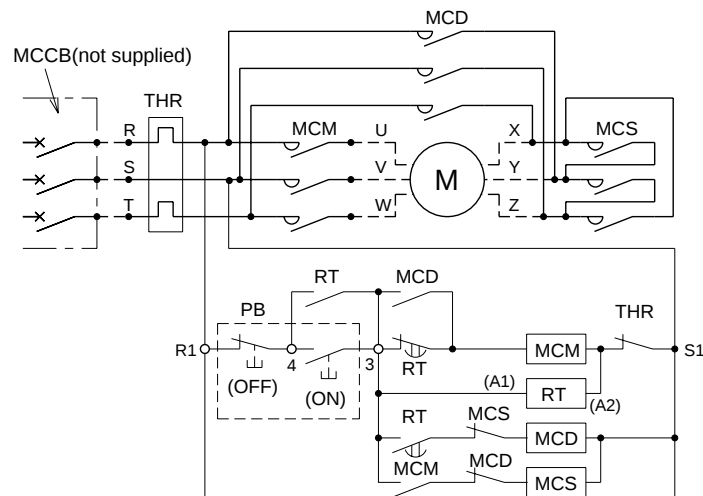


• Control Voltage

Table 5.3


EYD(O)-N20(KP)to N95(KP)			EYD(O)-N125(KP)to N300(KP)	
Control voltage designation	Rated voltage		Control voltage designation	Rated voltage 50Hz/60Hz
	50Hz	60Hz		
AC100V	100V	100-110V	AC100V	100-120V
AC120V	110-120V	115-120V	AC200V	200-240V
AC220V	208-220V	220V	AC400V	380-440V
AC230V	220-240V	230-240V		
AC380V	380V	380V		
AC400V	380-415V	400-440V		
AC415V	380-415V	400-440V		
AC440V	415-440V	460-480V		

5.3 Outline Dimensions


5.3.1 Open Type

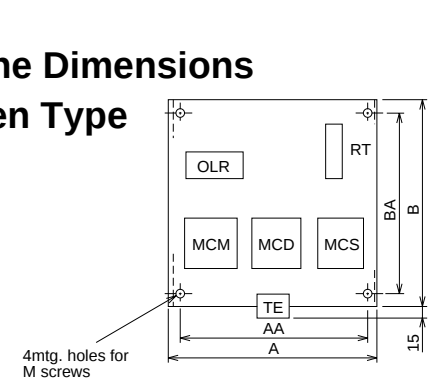

Type EYDO-N20, N35

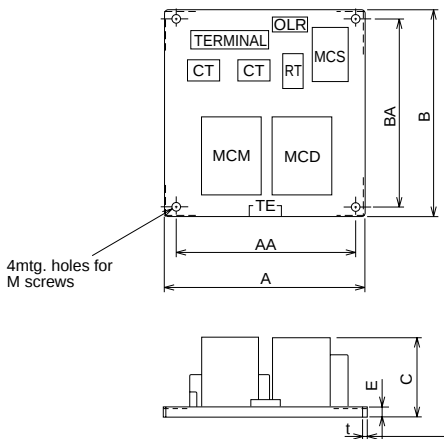

Type EYDO-N300, N400

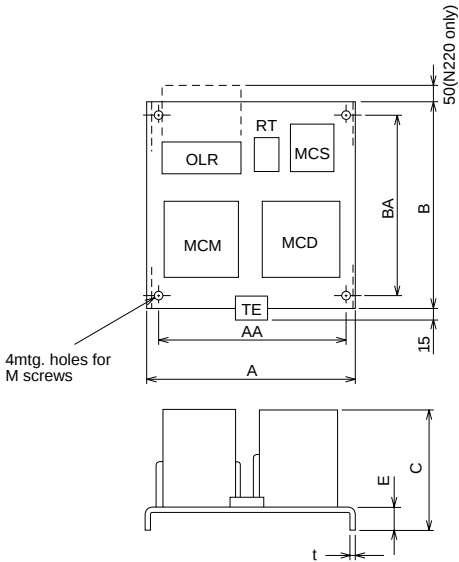


Type EYDO-N50~N220

• Dimensions


Table 5.4

Type	A	B	C	AA	BA	E	M	t	Mass (kg)
EYDO-N20	230	220	114	200	200	12	M6	2.3	4
EYDO-N35	270	270	114	250	250	12	M6	2.3	5
EYDO-N50	270	270	118	250	250	12	M6	2.3	5.5
EYDO-N65	270	270	118	250	250	12	M6	2.3	5.5
EYDO-N80	270	270	140	250	250	12	M6	2.3	7
EYDO-N95	380	430	180	350	400	15	M8	3.2	11
EYDO-N125	380	430	180	350	400	15	M8	3.2	13
EYDO-N150	380	430	189	350	400	15	M8	3.2	14
EYDO-N220	380	430	189	350	400	15	M8	3.2	21
EYDO-N300	600	600	210	550	550	15	M12	3.2	42
EYDO-N400	600	600	210	550	550	15	M12	3.2	42

5.3.2 Enclosed Type

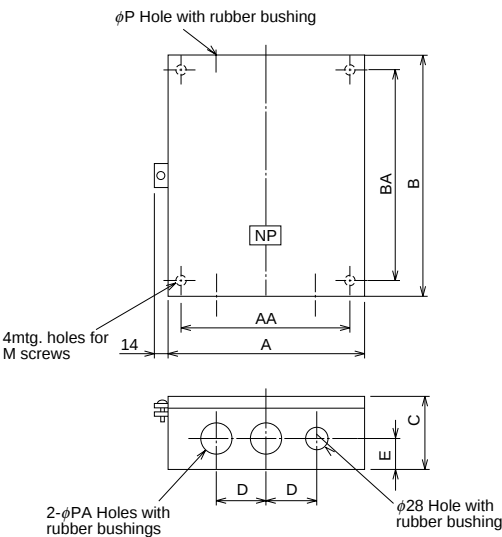

Type EYD-N20~N220

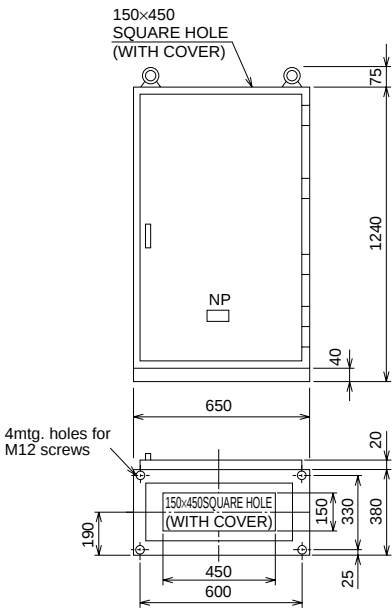

Type EYD-N300, N400 (Mass 120kg)

• Dimensions

Table 5.5

Type	A	B	C	AA	BA	D	E	M	P	PA	Mass (kg)
EYD-N20	260	360	165	200	300	75	60	M6	40	28	7
EYD-N35	310	460	165	250	400	75	60	M8	52	40	9
EYD-N50	310	460	165	250	400	75	60	M8	52	40	10
EYD-N65	310	460	165	250	400	75	60	M8	52	40	10
EYD-N80	310	460	165	250	400	75	60	M8	52	40	12
EYD-N95	460	660	225	400	600	125	80	M12	78	62	24
EYD-N125	460	660	225	400	600	125	80	M12	78	62	26
EYD-N150	460	660	225	400	600	125	80	M12	78	62	28
EYD-N220	460	660	225	400	600	125	80	M12	78	62	34

6. SOLID STATE CONTACTORS

Series **US-K**



6.1 Features

Ideal for heavy duty applications

The contactor contains no moving parts, so its reliability and long life are assured even in high cycling applications.

Silent operation


Since the contactor has no moving part, noise is eliminated.

Completely insulated power circuit

The power circuit elements are electrically insulated from the heatsink. No insulation of the heatsink is required.

Easy connection

Up-front wiring.

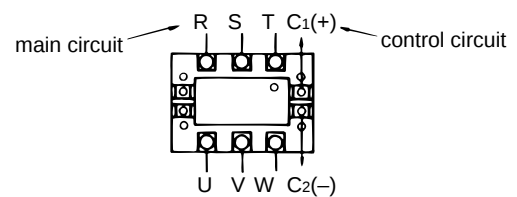

Built-in surge absorber


Surge absorbers are built-in for protection of the power circuit elements from line surges.

Indicator lamp shows operating condition

Front-mounted for clear indication of operational state.

Compact size

The contactor consists of a small size body and heatsink.

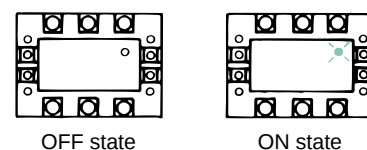

6.2 Product Scope.

200Vac Class (100 to 240Vac)	Item		Kinds and Ratings										
	Rated operational current (AC-1)		5	8	15	20		30					
	Heater capacity(kw)	1 ϕ 200V	1	1.6	3	4	4	6					
		3 ϕ 200V	1.7	2.7	5.2	6.9	6.9	10.3					
	Maximum motor capacity(kW)		0.4	0.4	1.5	2.2	2.2	3.7					
Three phase control type													
	US-K5SS US-K5SSTE		US-K8SS US-K88SSTE		US-K15NS US-K15NSTE		US-K20NS US-K20NSTE		US-K20SS US-K20SSTE		US-K30SS US-K30SSTE		
Individual high power control type													
400Vac Class 200 to 440Vac	Rated operational current (AC-1)								20		30		
	Heater capacity(kW)	1 ϕ 400V							8		12		
		3 ϕ 400V							13.8		20.7		
	Maximum motor capacity(kW)								3.7		7.5		
	Three phase control type												
		US-KH20SS US-KH20SSTE		US-KH30SS US-KH30SSTE									
Individual high power control type													
Options	Driving unit					UA-DR15 □ · UA-DR1 □							
	Driving unit with aux,output		UA-SH8 □			UA-SH15 □ · UA-SH1 □							
	Aux. output unit												
	Reversing unit												
	Fault detecting unit												
	Power control unit												
Mounting on 35mm rail													

200Vac Class 100 to 240Vac	Item		Kinds and Ratings					
	Rated operational current (AC-1)		5	8			20	30
	Heater capacity(kW)	1 ϕ 200V	1	1.6			4	6
		3 ϕ 200V	1.7	2.7			6.9	10.3
	Individual low power control type		 US-K5DD US-K5DDTE	 US-K8DD US-K8DDTE			 US-K20DD US-K20DDTE	 US-K30DD US-K30DDTE
Option	Power control unit		UA-PC ☐					
Mounting on 35mm rail								

Table 6.1

Kinds and Ratings							
40	50	70	80	100	120	150	200
8	10	14	16	20	24	30	40
13.8	17.3	24.2* ¹	27.7	34.6* ¹	41.5	52* ¹	69* ¹
5.5	5.5	11* ¹	11	15* ¹	15	18.5* ¹	22* ¹
							
US-K40SS US-K40SSTE	US-K50SS US-K50SSTE	US-K70NS US-K70NSTE	US-K80NS US-K80NSTE	US-K100TE	US-K120TE	US-K150TE	
							
		US-K70		US-K100		US-K150	US-K200
40	50	70	80	100	120	150	200
16	20	28	32	40	48	60	80
27.7	34.6	48.5* ¹	55.4	69.3* ¹	83	103.9* ¹	138.5* ¹
7.5	15	22* ¹	22	30* ¹	30	37* ¹	45* ¹
							
US-KH40SS US-KH40SSTE	US-KH50NS US-KH50NSTE	US-KH70NS US-KH70NSTE	US-KH80NS US-KH80NSTE	US-KH100TE	US-KH120TE	US-KH150TE	
							
		US-KH70		US-KH100		US-KH150	US-KH200
UA-DR1 ☐							
UA-SH1 ☐							
UA-AXUS							
UA-RE ☐							
UN-FD* ² · UN-FD4* ³							
UA-PC ☐							

Table 6.2

Kinds and Ratings	
40	50
8	10
13.8	17.3
	
US-K40DD US-K40DDTE	US-K50DD US-K50DDTE
UA-PC ☐	

Notes: 1. It shows the capacity in condition of combined two or three contactors for three phase circuits.

2. Applicable main circuit voltage is 200 to 240 Vac only.

3. Applicable main circuit voltage is 380 to 440 Vac.

MITSUBISHI ELECTRIC WORLDWIDE SALES NETWORK

Country/Region	Company name and address	Telephone
Australia	Mitsubishi Electric Australia Pty., Ltd., 348 Victoria Road, P.O. Box 11, Rydalmere NSW 2166, Australia	612-9684-7245
Belgium	Emac S.A., Industrialaan 1, 1702 Groot-Bijgaarden, Belgium	32-2-4810211
Chile	Rhona S.A., Vte. Agua Santa 4211 Casilla (P.O. Box) 30-D Viña Del Mar. Chile	032-610896
China	Setsuyo Auschina Electric Co. Ltd., Innobation Center Bldg., Room No. 406A Guiping Road, Shanghai, China	021-6495-6611
	Ryoden International Ltd., (Shanghai), Flat G, H, J, 4F Jin Ming Bldg., Block 2.8, Zun Yi Road South, Shanghai, China	021-6275-8377
Colombia	Proelectrico Ltda., Carrera 43G No. 27-12, P.O. Box 4346, Medellin, Colombia	2322300
Denmark	ELPEFA A/S., Geminivej 32, DK-2670 Greve, Denmark	45-43-694369
Egypt	Cairo Electrical Group 9, Rostoum Street, Appt #5 Garden City, P.O. Box 165-11516, MAGLIS AL-SHAAB, Cairo, Egypt	20-2-7961337
Germany	Mitsubishi Electric Europe B.V., German Branch, Gother Strasse 8, 40880 Ratingen, Germany	49-2102-4860
Greece	Drepnias Anton S.A., Lenormanman Str. 193, 104 42 Athens, Greece	30-15-141910
Hong Kong	Ryoden international Ltd., 10/F Manulife Tower, 169 Electric Road. North Point, Hong Kong	28878870
Indonesia	P.T. Sahabat Indonesia, Jl Muara Karang Selatan Blok A/Utara No.1, Kav No.11 P.O. Box: 5045/Jakarta/11050, Jakarta, Indonesia	6621780
Ireland	Mitsubishi Electric Europe B.V., Irish Branch, Westage Business Park, Ballymount, Dublin 22, Ireland	353-1-4505007
Israel	Gino Industries, 3 Ophir St., 32235 Haifa, Israel	972-4-8670656
Italy	Carpaneto 10090 Cascine Vica-Rivoli (To), Via Ferrero, 10-Ang. Pavia 6 Italy	39-11-9590111
Korea	STC Techno Seoul Co., Ltd. (Setsuyo), 2Fi. Dong Seo Game Channel Bldg. 660-11, Deungchon-Dong, Kanguseo-Gu, Seoul, Korea	02-3664-8333
Kuwait	Salem M Al-Nisf Electrical Co. W.L.L., P.O. Box 871, Safat, Kuwait	710036
Lao PDR	Societe Lao Import-Export, 43-47 Lane Xang Road, P.O. Box 2789, VT Vientiane. Lao PDR	21-215043, 21-215110
Lebanon	Comptoir d'Electricite Generate-Liban, Cebaco Center-Block A, Autostrade Dora, P.O. Box 11-2597, Beirut, Lebanon	961-1-240445
Myanmar	Peace Myanmar Electric Co., Ltd., No. 216, Bo Aung Gyaw Street, Botataung 11161, Yangon, Myanmar	951-295426
Nepal	Wait & Vol1 House Co., Ltd., KHA 2-65, Volt House Dilli Bazar, P.O. Box 2108, Kathmandu. Nepal	977-1-411330
Netherlands	R+H Technology B.V., Industrieweg 30, 3361 HJ Slidrecht, Netherlands	31-104871521
New Zealand	Melco Sales (N.Z.) Ltd., 1 Parliament Street, Lower Hut1, New Zealand	644-569-7350
Norway	SCANELECAS, 5074 Godvik Leirvikasen 43B, Norway	47-55-506000
Pakistan	Prince Electric Co., 16 Brandreth Road Lahore 54000, Pakistan	7654342
Peru	I.T.E., Ingenieros s.a., Paseo de la Republica 3573, Lima 27, Peru	5114-41-1825
Philippines	Edison Electric Integrated Inc., 24th Fl. Galleria Corporate Center, Edsa Cr. Ortigas Ave., Quezon City, Metro Manila, Philippines	02-643-8691
Poland	MPL Technology Sp Zo.o., Ul, Wroclawska 53, 30011 Krakow, Poland	48-12-322885
Saudi Arabia	Center of Electrical Goods, Al-Nabhaniya Street-4th Crossing Al-Hassa Road, P.O. Box 15955, Riyadh 11454, Saudi Arabia	966-1-4770149
Singapore	Mitsubishi Electric Sales, Singapore Pty. Ltd., No.6, Commonweath Lane #01-01 Singapore 149547	65-4767439
Slovenia	INEA, Ljubijanska 80, 61230 Domzale, Slovenia	386-61-718000
South Africa	M.S.A. Manufacturing (Pty) Ltd., Bramley 2018, Johannesburg, South Africa	011-444-8080
Spain	Mitsubishi Electric Europe B.V., Spanish Branch (Barcelona), Polingono industrial "Can Magi", Calle Joan Bascalla 2-4, Apartado de Correos 420, 08190 Sant Cugat del Valles, Barcelona, Spain	34-3-565-3131
Sweden	Euro Energy Components AB, Energigatan 15 S-43422 Kungsbacka Sweden	(0)300-51800
Switzerland	Trietec A G., Mühlenstrasse 136, 8200 Schaffhausen, Switzerland	41-52-6258425
Taiwan	Setsuyo Enterprise Co., Ltd., 8th Fl. No.88 Sec. 6, Chung-Shan N. Rd., Taipei. Taiwan, ROC	02-2381-3015
Thailand	United Trading & Import Co. Ltd., 77/12 Bumrung Muag Road, Klong Mahanak, Pomprab, Bangkok 10100, Thailand	223-4220
Turkey	HEDEF, Balmumcu-Istanbul Barboros Bulv. iba Blokleri Gazi Umur P. So Turkey	90-212-2754876
U.K.	Mitsubishi Electric Europe B.V., UK Branch, Travellers Lane, Hatfield, Herts AL 10 8 XB, England, U.K.	44-1707-276-100
U.S.A	Mitsubishi Electric Automation, Inc., 500 corporate Woods Parkway	847-478-2100
Uruguay	Fierro Vignoti S.A., Avda, 1274 Montevideo, Uruguay	920808
Venezuela	Adesco C.A., Apartado de Correos 78034 Caracas 1074A, Venezuela	2422348
Vietnam	Sa Giang Techno Co., Ltd. (Setsuyo), 207 Nguyen Van Thu S1., Dist 1 HCMC, Vietnam	848-821-5450

Safety tip: Be sure to read the instruction manual thoroughly before using these products.


MITSUBISHI ELECTRIC CORPORATION
 HEAD OFFICE: MITSUBISHI DENKI BLDG., 2-2-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN