变更编号 No：	变 更 内 容 Modification	修改 Modified By	批准 Approved By	日期 Date

变 更 经 历
Modification Career

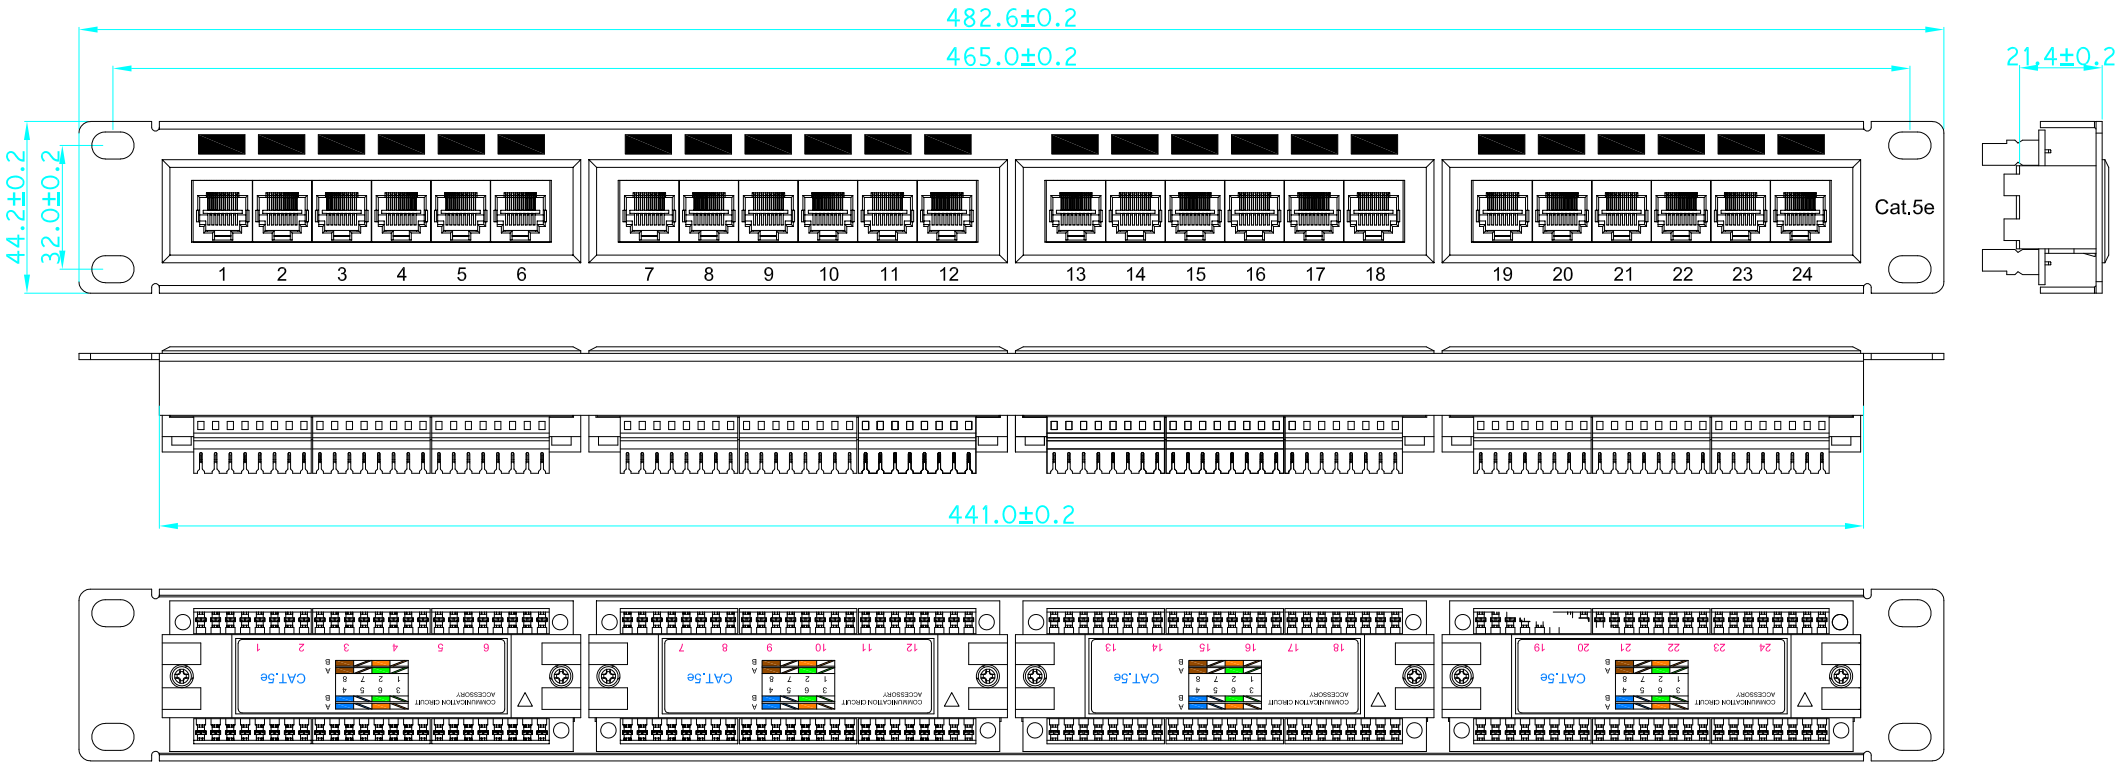

NOTES:

ELECTRICAL:

1. VOLTAGE RATING : 125 VAC RMS
2. CURRENT RATING : 1.5 AMP
3. CONTACT RESISTANCE : 100 MILLIOHMS MAX
4. INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC
5. DIELECTRIC STRENGTH : 750 VAC RMS 60Hz,1MIN

ENVIRONMENTAL:

1. STORAGE : -40° TO +70°
2. OPERATION : -10° TO +60°

CONFORM TO TIA/EIA 568B CATEGORY 5e
MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68,

MECHANICAL:

1.HOUSING MATERIAL : PBT
2.PANEL FRAME : SPCC, POWDER COATING IN BLACK COLOR
3.IDC MATERIAL : PC UL94V-2 TERMINAL:PHOSPHOR BRONZE,TIN PLATING
4.RJ45 JACK LIFE : 750 TIMES MIN
5.IDC LIFE : 200 TIMES MIN
6.WIRE : AWG 23~26
7.TIA Cat.5e Perm. Link Test: Worst pair NEXT margin≥5.0dB
8.Retentiveness of insertion structure: 50N 60±5s

					客户 Clinet	
					重量 Weight	
					材料 Material	
部件名称 Part	部件编号 Part NO.		单位 Unit	mm	产品型号 Product NO：	
			版本 REV		595066	
设计 Designed by	审核 Verified by	核准 Approved by	比例 Scale		产品名称 Product	
			页次 Page		Cat.5e 24口型欧式配线架（双用IDC）	

未注公差
Tolerances except as noted

0.00-20.00	±0.10
20.00-50.00	±0.15
50.00-100.00	±0.20
100.00-	±0.25
Angle	±1°

First angle projection