


变更经历  
Modification Career

变更编号 No:	变更内容 Modification	修改 Modified By	批准 Approved By	日期 Date

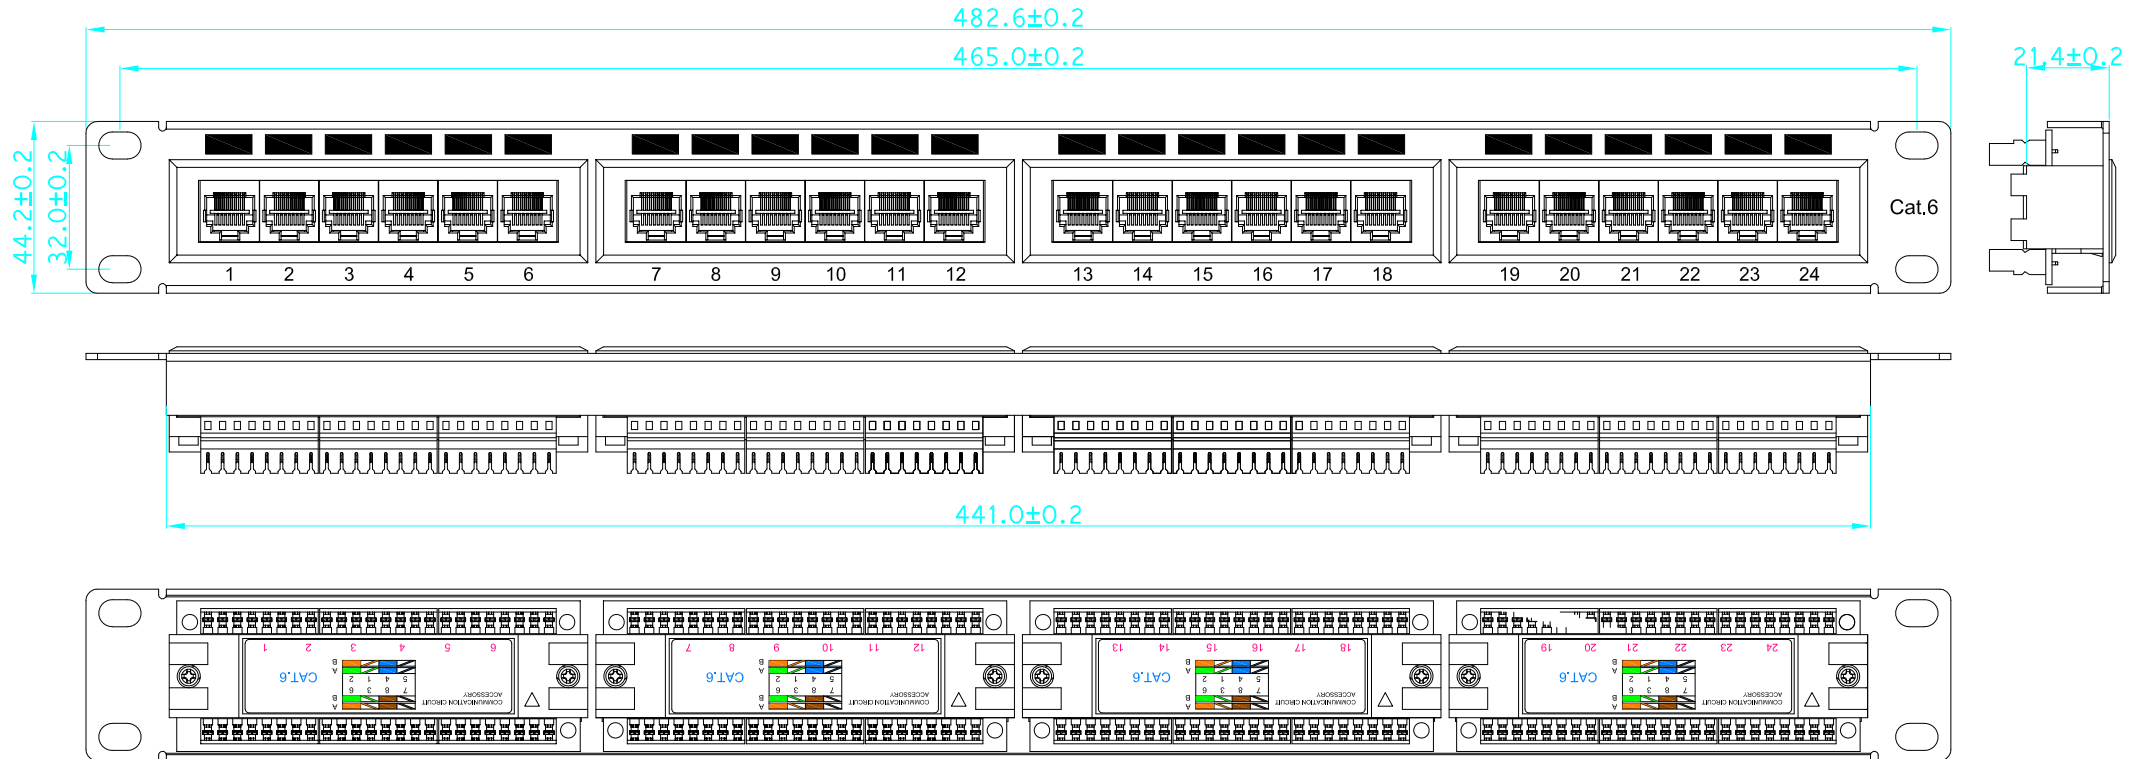

NOTES:

ELECTRICAL:

- VOLTAGE RATING : 125 VAC RMS
- CURRENT RATING : 1.5 AMP
- CONTACT RESISTANCE : 100 MILLIOHMS MAX
- INSULATION RESISTANCE : 1000 MEGOHMS MIN @ 500 VDC
- DIELECTRIC STRENGTH : 750 VAC RMS 60Hz,1MIN

ENVIRONMENTAL:

- STORAGE : -40° TO +70°
- OPERATION : -10° TO +60°

CONFORM TO TIA/EIA 568B CATEGORY 5e

MATES WITH MODULAR PLUG CONFORMING TO FCC PART 68,

MECHANICAL:

- HOUSING MATERIAL : PBT
- PANEL FRAME : SPCC, POWDER COATING IN BLACK COLOR
- IDC MATERIAL : PC UL94V-2 TERMINAL:PHOSPHOR BRONZE,TIN PLATING
- RJ45 JACK LIFE : 750 TIMES MIN
- IDC LIFE : 200 TIMES MIN
- WIRE : AWG 23~26
- TIA Cat.6 Perm. Link Test: Worst pair NEXT margin≥3.0dB
- Retentiveness of insertion structure: 50N 60±5s

				客户 Client		未注公差	
				重量 Weight		Tolerances except as noted	
				材料 Material		0.00-20.00	±0.10
				产品型号 Product NO:		20.00-50.00	±0.15
						50.00-100.00	±0.20
						100.00-	±0.25
						Angle	±1°
部件名称 Part	部件编号 Part NO.	单位 Unit	mm	版本 REV			
设计 Designed by	审核 Verified by	核准 Approved by	比例 Scale	产品名称 Product	First angle projection		
			页次 Page	Cat. 6 24口欧式配线架 (双层IDC)			