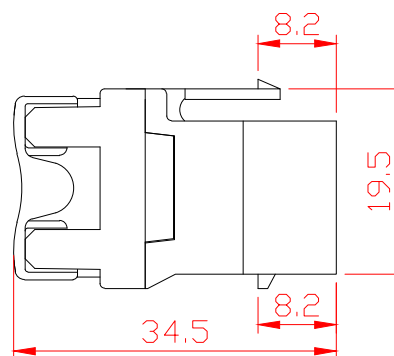
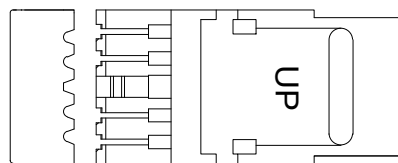
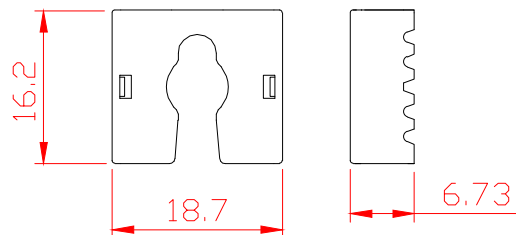


贴纸示意图

NOTES:

ELECTRICAL:



1. VOLTAGE RATING:125 VAC RMS
2. CURRENT RATING:1.5AMP
3. CONTACT RESISTANCE:100MILLIOHMS MAX
4. INSULATION RESISTANCE:1000 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH:750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE:-40° TO +85°
2. OPERATION:0° TO 70°

MECHANICAL:

1. HOUSING MATERIAL:PC
2. INSERT MATERIAL:FAME RETARDANCY PBT
3. PCB MATERIAL:FR-4 T=1.6mm
4. CONTACT MATERIAL:PHOSPHOR BRONZE
STAMP PIN T=0.30mm
5. IDC CONTACT MATERIAL:PHOSPHOR BRONZE
T=0.50mm WITH TIN PLATING
6. RJ45 JACK ;LIFE:750 TIMES MIN
7. IDC LIFE:200 TIMES MIN
8. WIRE:AWG 22-26

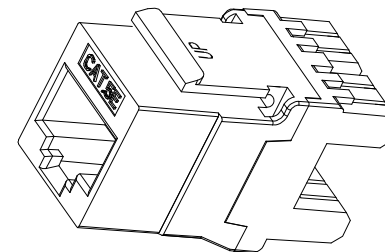

									Item No.	595104
SYM	Number	Bill No. of Alteration	Signature	Date	Material	Size	Scale	Unit	Part Name	UTP Cat.6 Keystone Jack
Drawn				Tolerance		A4	X:1	mm	ERP	
Checked				0.00~20.00 ±0.10						
				20.00~30.00 ±0.15						
				30.00~50.00 ±0.20						
				50.00~100.00 ±0.25						
				100.00~ Angle ±0.25						
Approved					Sheet	1 OF 1	Version: A/0		Part No.	