
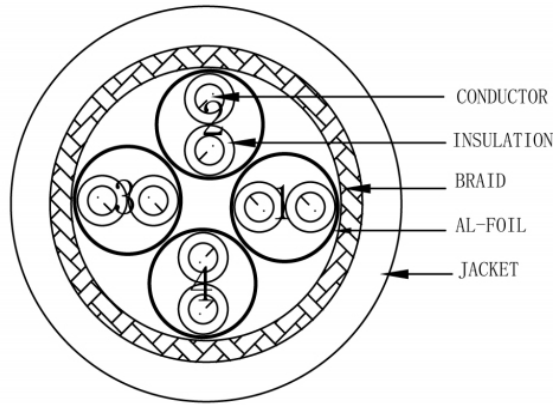


WIRING DIAGRAM

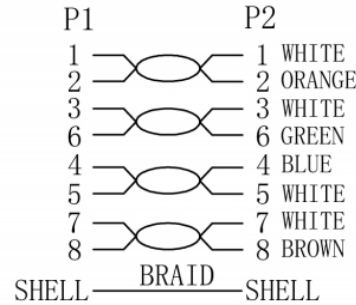

Material list:

③	Jacket	LSOH		
②	PLUG	POLY CARBONATE RJ45 8P8C PIN FU.Nickel plated iron shell	2PCS	
①	WIRE	S/FTP CAT. 6A 26AWG (7/0.16±0.008BC+AL-FOIL)*4PAIR +B(0.12/4/16)AL-MG LSOH/90A OD:5.8±0.2MM	1PCS	
NO.	Material name	Specifications	QTY	REMARK

Remarks:

- 100% open circuit short circuit&displacement test
- Fluke channel link test(100%pass the test)
- $L \leq 5m$: link 50m+L+L
- $5 < L \leq 15m$: link 50m+0.5m+L
- $15 < L \leq 30m$: Fluek channel test
- TEST LIMIT:ISO11801 Channel Class E
- Working temperature:-10°C ~ + 60°C
4. ROHS2.0 AND REACH COMPLIANT

				Customer name		Customer Part NO	
				Product name		CAT. 6A S/FTP PATCH CORD 26AWG	
		New edition		A		Unit	
Darwing		Audit		Darwing		Audit	
		Amendment record		Approve		Date	
						2021-11-30	