



Uso Industrial | 200 Kg.



ESCALERAS CUPRUM


# Escalera de extensión de fibra de vidrio

## Serie 578

Modelo	578-16N+	578-20N	578-24N	578-28N	578-32N	578-36N	578-40N
# Pies	16	20	24	28	32	36	40
# Peldaños	16	20	24	28	32	36	40
Altura total (m)	3.97	5.19	6.41	7.63	8.85	9.77	10.67
Altura Máx para pararse (m)	2.82	4.05	5.27	6.48	7.63	8.53	9.14
Alcance Máx de trabajo (m)*	4.82	6.05	7.27	8.48	9.63	10.53	11.14
Peso aprox. (kg)	12.20	18.50	22.68	26.50	31.11	32.29	38.64
Volumen aprox. (m³)	0.22	0.26	0.31	0.37	0.43	0.49	0.54

\*Se considera el alcance máximo de trabajo en la escalera de una persona que con su brazo extendido alcanza 2 m.

\*No incluye sistema de polea y cuerda.

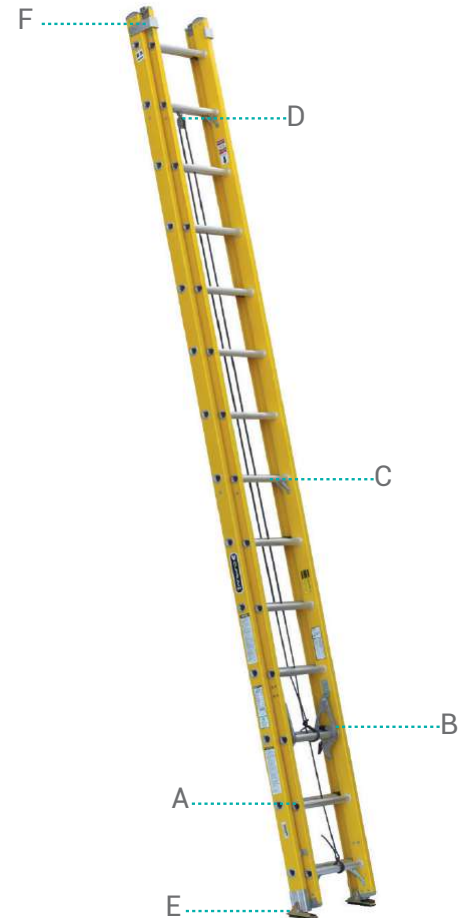

Conexión directa peldaño-larguero



QuickLatch®



Peldaño en forma de "D"



Sistema de polea y cuerda



Tacón de doble acción con goma que previene derrapes



Guías de deslizamiento



ANSI Tipo I



EscalerasCuprum